95TH ANNIVERSARY

HANCO

SPECIALTY TIRE AND TUBE CATALOG




Phone: 651-456-5600 or 800-328-7400
Fax: 651-456-9709 or 800-328-7401
Website: www.hancousa.com

Whether it is that common specialty tire or a rare application Hanco strives to have it in stock for immediate delivery. Consider Hanco your "go to" whether you're looking for a large quantity or that one hard to find tire. We stock inner tubes from the smallest handcart application to the largest agricultural and industrial applications. As new sizes of tires are introduced we strive to have inner tubes available for them as well.

We are continually upgrading our online ordering website at www.hancousa.com to include our latest product availabilities and options. This site not only allows you to browse tires and inner tubes, but our many other products and services as well. You will find pricing, availability, images, extended descriptions, parts breakdowns, and more. Ordering through the site is fast and easy! If you prefer to call, our knowledgeable and courteous customer service team is ready to help. Hanco continues to produce print catalogs and will strive to maintain the highest level of service in the industry.

Call Hanco to request our Wholesale Catalog and our Chain Catalog

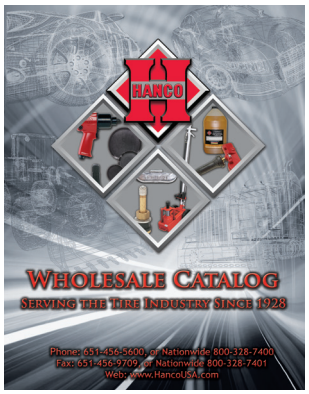



You can also download both catalogs at www.hancousa.com

To place an order:

Call locally to (651) 456-5600 or Nationwide to (800) 328-7400.

Order Online 24 hours a day at www.hancousa.com

Email orders or questions to: customerservice@hancousa.com

Our office hours:

Monday - Thursday: 7:30 - 5:00
Friday: 7:30 - 4:30
Saturday & Sunday: Closed

Create an open account:

Our credit application forms can be downloaded from our website at www.hancousa.com
You can also request our credit application forms and we will email them directly to you.

Hanco accepts these credit cards:

VISA
mastercard
AMERICAN EXPRESS
DISCOVER

We Ship Nationwide!



Hanco ships same day on all orders placed by 3:30 PM.
(Some exceptions apply with freight orders)

***Transit times deemed accurate but not guaranteed**

2855 Eagandale Blvd,
Eagan MN 55121
1-800-328-7400
www.hancousa.com

Shipping errors: We take pride in our shipping accuracy, however errors do occur. In case of a shipping error please report it within 48 hours of delivery

Hanco reserves the right to correct typographical errors and omissions.

This catalog may not be reproduced in whole or in part by anyone without written consent of Hanco. ©Copyright 2023, Hanco Corporation. All rights reserved

Quick Find Index

Tires, Wheels & Chain

Agricultural Chains 45
Agricultural Tires 44
ATV Chain 37
ATV Tires 25-36
Bias Trailer Tires 2-4
Forklift Chains 40
Forklift Tires 38-39
Golf Cart Tires 23-24
High Speed Trailer Tires 2-7
High Speed Wheels 8
Industrial Chain 40, 43, 45
Industrial Tires 38-44
Lawn/Garden Chain 24
Lawn/Garden Tires 9-17
Low Speed Tires 18-19
Radial Trailer Tires 5-7
Skid Steer Chain 43
Skid Steer Tires 41-42
Snowblower Tires 21
Specialty LPT Tires 2, 4
Specialty Tires 38
Traction Tread Tires 20-22
Wheelbarrow Tires 18-19

Charts


Alphabetical Index 63-64
Alpha Numeric & Load Range ... 7
Industrial Size Conversion 43
Valve Offset 56
Valve Reference 57


Inner Tubes, Flaps & O-Rings

ATV 54
Drag Racing 53
Farm Front/Implement 50
Farm Rear 51-52
Flaps 58
Heavy Duty Truck & Bus 48
High Speed Trailer 53
Industrial 55
Lawn & Garden/Golf Cart 53
Light Truck 47
Loader/Grader 49
Low Platform Trailer 48
Motorcycle / Scooter 56
Natural Rubber 49, 52-53
Off-The-Road 49
O-Rings & L-Rings 59
Radial Passenger 46
Severe Service 52

Accessories

Agricultural Valve Kit 49
Bead Lubricants 60
Bead Seaters 61-62
Inflation Cages 40
Small Tire Changer 62
Small Tire Irons 60
Tire Carts & Dollies 59
Tire Sealants 44
Tire Studs & Equipment 61
Valve Fishing Tools 59

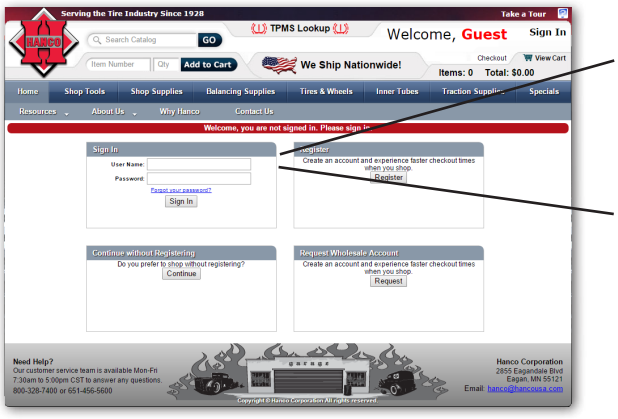

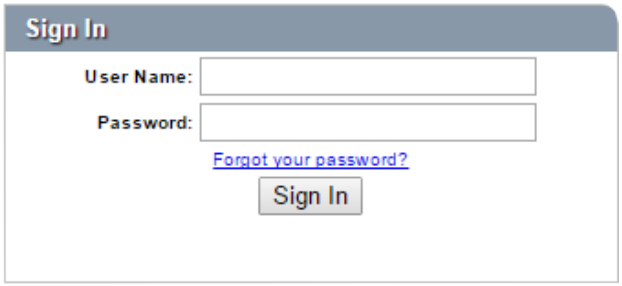

Write your user name and password in the space above for ease of access to our online ordering site at www.hancousa.com

Complete Alphabetical Index on Pages 63 & 64

Bias Ply High Speed Trailer Tires



USA Trail



Sport Trail



Sport Trail LH

CARLISLE USA Trail

Part No.	Size	Load Range	Mtd. Dia. (Inches)	Mtd. Width (Inches)	Rim Width (Inches)	Max Load (lb)	Max PSI	Tire Weight (lb)	Tread Depth (32nds)
TIR1360	6.90-9	C	22.0	7.1	4.50	1100	60	13.5	10

CARLISLE Sport Trail

Part No.	Size	Load Range	Mtd. Dia. (Inches)	Mtd. Width (Inches)	Rim Width (Inches)	Max Load (lb)	Max PSI	Tire Weight (lb)	Tread Depth (32nds)
TIR20100	4.80-8	B	16.2	4.7	3.75	585	60	5.8	7
TIR20101	4.80-8	C	16.3	4.9	3.75	760	90	6.4	7
TIR20102	5.70-8	B	18.1	5.9	3.75	715	50	9.2	10
TIR20103	5.70-8	C	18.4	6.0	3.75	910	75	9.9	10
TIR20138	16.5x6.5-8	D	16.6	6.81	5.375	910	90	11	7
TIR20140	18.5x8.5-8	C	17.94	8.55	7	935	50	14	10
TIR20147	20.5x8.0-10	C	20.86	8.02	6	1100	50	17	10
TIR20148	20.5x8.0-10	D	20.69	8.25	6	1320	70	17	10
TIR20149	20.5x8.0-10	E	20.6	8.21	6	1520	90	18	10
TIR20150	20.5x8.0-10	F	21.2	8.5	6.00	1650	105	18.3	11

CARLISLE Sport Trail LH

Part No.	Size	Load Range	Mtd. Dia. (Inches)	Mtd. Width (Inches)	Rim Width (Inches)	Max Load (lb)	Max PSI	Tire Weight (lb)	Tread Depth (32nds)
TIR2110	4.80-12	B	20.6	5.0	4.0	785	60	8.0	6
TIR2112	4.80-12	C	20.6	5.0	4.0	990	90	9.0	6
TIR2114	5.30-12	B	21.6	5.3	4.0	855	55	10.0	6
TIR2116	5.30-12	C	21.6	5.3	4.0	1050	80	10.4	8
TIR2134	ST175/80D13	C	24.0	6.9	4.5	1360	50	16.6	8
TIR2136	ST185/80D13	C	24.4	7.1	4.5	1480	50	19.0	8
TIR2138	ST205/75D14	C	25.8	7.9	5.5	1760	50	20.1	8
TIR2140	ST215/75D14	C	26.7	8.4	6.0	1870	50	21.0	8
TIR2142	ST205/85D14.5 (8-14.5)	F	27.8	8.0	6.0	2830-S 2470-D	95	28.7	9
TIR2144	ST205/75D15	C	27.1	8.0	5.5	1820	50	21.0	8
TIR2160	ST205/90D15 (7.00-15)	D	29.4	8.0	5.5	2600-S 2270-D	65	32.1	12
TIR2152	ST225/75D15	D	28.3	8.6	6.0	2540	65	25.0	9
TIR2162	ST225/90D15 (7.50-16)	E	31.8	8.7	6.0	3530-S 3080-D	80	38.8	12

S = Single D = Dual


Order by phone (651) 456-5600; Toll free: (800) 328-7400

Bias Ply High Speed Trailer Tires



Kenda High Speed Trailer

Part No.	Size	Load Range	Tread Design	Mtd. Dia. (Inches)	Mtd. Width (Inches)	Rim Width (Inches)	Max Load (lb)	Max PSI	Tire Weight (lb)	Tread Depth (32nds)
TIR100100	4.80-8	B	K371	16.7	4.9	3.75	590	60	5.3	6
TIR100110	4.80-8	C	K371	16.7	4.9	3.75	745	75	6.0	6
TIR100130	5.70-8	C	K353	19.0	6.0	3.75	910	75	9.8	6
TIR100230	165/65-8 (16.5x6.50-8)	C	K399	16.5	6.6	5.38	800	70	10.0	9
TIR100240	215/60-8 (18.5x8.50-8)	C	K399	18.3	8.9	7.00	935	50	12.0	9
TIR100250	215/60-8 (18.5x8.50-8)	D	K399	18.3	8.9	7.00	1165	70	12.5	9
TIR100135	6.90-9	C	K364	21.1	6.5	4.50	1120	60	13.0	9
TIR100260	205/65-10 (20.5x8.0-10)	C	K399	20.5	8.3	6.00	1100	50	13.8	9
TIR100262	205/65-10 (20.5x8.0-10)	D	K399	20.6	8.3	6.00	1330	70	15.6	9
TIR100264	205/65-10 (20.5x8.0-10)	E	K399	20.4	8.4	6.00	1650	90	16.1	9
TIR100140	4.80-12	B	K353	20.5	4.8	4.00	520	60	8.9	9
TIR100150	4.80-12	C	K353	20.5	4.8	4.00	780	75	9.5	9
TIR100160	5.30-12	B	K353	21.8	5.4	4.00	835	55	10.0	9
TIR100170	5.30-12	C	K353	21.8	5.4	4.00	1035	75	11.6	9
TIR100222	ST185/80D13	C	K550	24.4	7.2	5.00	1480	50	18.0	9
TIR100224	ST185/80D13	D	K550	24.4	7.2	5.00	1725	65	19.5	9

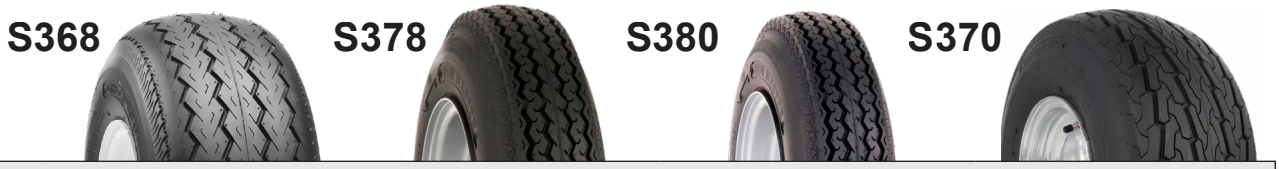

Towmaster High Speed Trailer

Part No.	Size	Tread Design	Load Range	Mtd. Dia. (Inches)	Mtd. Width (Inches)	Rim Width (Inches)	Max PSI	Max Load (lb)	Tire Weight (lb)	Tread Depth (32nds)
TIR19010D	4.80-8	S380	C	16.3	4.9	3.75	90	760	5.1	7
TIR19020D	5.70-8	S378	C	18.3	5.6	3.75	75	910	7.9	9
TIR19065D	5.30-12	S378	C	21.85	5.4	4.0	80	1045	10.1	9
TIR19240D	18.5x8.5-8	S368	C	18.2	8.4	7.0	50	940	11.1	8
TIR19264D	20.5x8.0-10	S368	E	20.5	7.8	6.0	90	1535	17.5	10
TIR19266D	20.5x8.0-10	S368	F	20.5	7.8	6.0	110	1765	17.8	10
TIR19300	22.5x8.0-12	S370	F	22.5	8.7	6.0	110	1980	21.8	10

Mounted assemblies available with any in-stock wheel.

Bias Ply High Speed Trailer Tires



D901 / D622



D268



D292



D902

DEESTONE High Speed Trailer

Part No.	Size	Load Range	Tread Design	Mtd. Dia. (Inches)	Mtd. Width (Inches)	Rim Width (Inches)	Max Load (lb)	Max PSI	Tire Weight (lb)	Tread Depth (32nds)
TIR19010	4.80-8	C	D901	16.70	4.60	3.75	745	90	5.6	6
TIR19020	5.70-8	C	D901	18.60	5.60	4.50	910	75	9.2	6
TIR19025	5.70-8	D	D901	18.60	5.60	4.50	1075	100	9.5	6
TIR19230	16.5x6.5-8	C	D268	16.30	6.80	5.30	795	70	8.7	9
TIR19240	18.5x8.5-8	C	D268	18.10	8.40	7.00	940	50	12.5	9
TIR19260	20.5x8.0-10	C	D268	20.60	8.10	6.00	1105	50	15.0	9
TIR19264	20.5x8.0-10	E	D268	20.60	8.10	6.00	1535	90	15.9	9
TIR19055	4.80-12	C	D901	21.30	5.20	3.75	990	90	9.4	6
TIR19065	5.30-12	C	D901	22.10	5.30	4.25	1045	80	11.8	6
TIR19070	ST165/80D13	C	D622	23.30	6.30	4.53	1232	50	15.2	9
TIR19080	ST185/80D13	C	D622	24.80	7.33	5.00	1480	50	17.6	9
TIR19367	7-14.5	F	D292	26.61	7.48	6.00	2335	100	23.9	8
TIR19370	8-14.5	F	D902	27.90	8.00	6.00	2790	100	27.0	11
TIR19380	9-14.5	F	D902	27.80	8.90	7.00	3230	100	38.3	11
TIR19100	ST205/75D15	C	D901	27.20	7.50	5.50	1820	50	22.0	10

Mounted assemblies available with any in-stock wheel.

High Pressure .453" Snap-In Valve Stem - 80 PSI Max

Part No.	Effective Length	Box Qty.
MVHTR600HP	1-1/4"	1
MVHTR600HP-50	1-1/4"	50
MVHTR600HP-500	1-1/4"	500
MVHTR602HP	2"	1

High Pressure .625" Snap-In Valve Stem - 80 PSI Max

Part No.	Effective Length	Box Qty.
MVHTR801HP	1-1/4"	1
MVHTR802HP	2	1



TR600HP

.453" & .625" Snap-In Valve Stem - Brand/Box Qty

TR #	Effective Length	Valve Hole	Xtra-Seal		Dill
			50/Box	500/Box	500/Box
TR412	7/8"	.453	XSV412-50	XSV412-500	--
TR413	1-1/4"	.453	XSV413-50	XSV413-500	DLV413-500
TR414	1-1/2"	.453	XSV414-50	XSV414-500	DLV414-500
TR415	1-1/4""	.625	XSV415-50	--	DLV415-500
TR418	2"	.453	XSV418-50	XSV418-500	DLV418-500
TR423	2-1/2"	.453	XSV423-50	XSV423-500	DLV423-500



TR413

Radial High Speed Trailer Tires



Radial Trail HD

CARLISLE Radial Trail HD

Part No.	Size	Load Range	Mtd. Dia. (Inches)	Mtd. Width (Inches)	Rim Width (Inches)	Max Load (lb)	Max PSI	Tire Weight (lb)	Tread Depth (32nds)
TIR2802	ST175/80R13	C	24.1	7.0	5.0	1360	50	20.2	8
TIR2804	ST175/80R13	D	24.1	7.0	5.0	1570	65	20.2	8
TIR2810	ST185/80R13	C	24.7	7.2	5.0	1480	50	21.9	8
TIR2812	ST185/80R13	D	24.7	7.2	5.0	1710	65	21.9	8
TIR2822	ST205/75R14	C	26.1	7.8	5.5	1760	50	22.7	9
TIR2824	ST205/75R14	D	26.1	7.8	5.5	2040	65	22.7	9
TIR2828	ST215/75R14	C	26.7	8.3	6.0	1870	50	23.5	9
TIR2834	ST205/75R15	D	27.1	7.8	5.5	2150	65	23.7	9
TIR2840	ST225/75R15	D	28.3	8.6	6.0	2540	65	30.8	9
TIR2842	ST225/75R15	E	28.1	8.8	6.0	2830	80	29.4	9
TIR2848	ST235/80R16	E	30.8	9.0	6.0	3520-S 3080-D	80	34.0	10
TIR2852	ST235/85R16	E	31.7	9.3	6.0	3640-S 3200-D	80	43.1	12
TIR2854	ST235/85R16	F	31.7	9.3	6.0	3960-S 3520-D	95	43.1	12

S = Single D = Dual



Ultra Sport Radial RH

CARLISLE Ultra Sport Radial RH

Part No.	Size	Load Range	Mtd. Dia. (Inches)	Mtd. Width (Inches)	Rim Width (Inches)	Max Load (lb)	Max PSI	Tire Weight (lb)	Tread Depth (32nds)
TIR1585	ST235/60R15	D	26.2	9.2	7.0	2200	65	31.0	16



Radial Trail RH

CARLISLE Radial Trail RH

Part No.	Size	Load Range	Mtd. Dia. (Inches)	Mtd. Width (Inches)	Rim Width (Inches)	Max Load (lb)	Max PSI	Tire Weight (lb)	Tread Depth (32nds)
TIR1500	ST145/R12	D	21.4	5.9	4.0	1220	65	15.0	9
TIR1502	ST145R12	E	21.4	6.0	4.0	1520	80	17.0	9

Mounted assemblies available with any in-stock wheel.

Radial High Speed Trailer Tires



Ultra CRT

Carlstar Ultra CRT

Part No.	Size	Load Range	Mtd. Dia. (Inches)	Mtd. Width (Inches)	Rim Width (Inches)	Max Load (lb)	Max PSI	Tire Weight (lb)	Tread Depth (32nds)
TIR2720	ST175/80R13	C	23.8	6.9	4.5	1360	50	16.5	9
TIR2724	ST185/80R13	C	24.8	7.1	4.5	1480	50	17.55	8.6
TIR2728	ST205/75R14	C	25.9	7.9	5.5	1760	50	22.1	10
TIR2734	ST215/75R14	C	26.4	8.4	6.0	1870	50	21.95	9.7
TIR2740	ST205/75R15	D	26.9	7.9	6.0	2150	65	23.7	10
TIR2744	ST225/75R15	D	28	8.7	6.0	2540	65	26.85	9.7
TIR2746	ST225/75R15	E	28.0	8.7	6.0	2830	80	25.9	10
TIR2752	ST235/80R16	E	30.5	9.2	6.0	3520-S 3080-D	80	34.8	10
TIR2754	ST235/85R16	F	31.9	9.2	6.5	3960-S 3520-D	95	43.0	9



CSL 16

Carlstar All Steel CSL 16

Part No.	Size	Load Range	Mtd. Dia. (Inches)	Mtd. Width (Inches)	Rim Width (Inches)	Max Load (lb)	Max PSI	Tire Weight (lb)	Tread Depth (32nds)
TIR1600	ST225/75R15	F	28.3	8.7	6.0	3080	95	45.0	11
TIR1602	ST235/80R16	G	30.6	9.0	6.0	4080-S 3640-D	110	60.0	10
TIR1604	ST235/85R16	G	31.7	9.3	6.5	4400	110	60.1	11

CSL 16 offers heavy duty hauling capabilities for large equipment and extremely heavy loads. All-steel body for a load rating of up to 4,400 pounds of towing capacity. Robust construction combined with an industrial highway tread design leads to extended service life on the highway and protects against environmental elements.



Omni Trail

Omni Trail High Speed Trailer Tires

Part No.	Size	Load Range	Mtd. Dia. (Inches)	Mtd. Width (Inches)	Rim Width (Inches)	Max Load (lb)	Max PSI	Tire Weight (lb)	Tread Depth (32nds)
TIR19825	ST205/75R14	D	26.0	8	5.5	2040	65	22.75	10
TIR19850	ST205/75R15	D	27.1	8.0	5.5	2150	65	24.0	10
TIR19870	ST225/75R15	E	28.3	9.3	6.0	2830	80	28.0	10
TIR19880	ST235/80R16	E	30.8	9.3	6.0	3520	80	35.0	10

Mounted assemblies available with any in-stock wheel.

Order by phone (651) 456-5600; Toll free: (800) 328-7400

Radial High Speed Trailer Tires



KR03

Kenda Loadstar Karrier KR03

Part No.	Size	Load Range	Mtd. Dia. (Inches)	Mtd. Width (Inches)	Rim Width (Inches)	Max Load (lb)	Max PSI	Tire Weight (lb)	Tread Depth (32nds)
TIR100212	ST175/80R13	D	21.4	7.0	5.0	1610	65	19.9	9

The Kenda Karrier ST radial is one of the best trailer tires on the market today. The Karrier offers double steel belts with full nylon plies for heavy-duty applications and increased tire life. The computer-generated tread design in conjunction with a new tread rubber compound provides superior traction in wet or dry conditions. Karrier radial tires are continually tested to ensure a smoother ride while providing additional stability at highway speeds.



KR17

Kenda Loadstar Kenetica KR17

Part No.	Size	Load Range	Mtd. Dia. (Inches)	Mtd. Width (Inches)	Rim Width (Inches)	Max Load (lb)	Max PSI	Tire Weight (lb)	Tread Depth (32nds)
TIR100290	ST215/65R17	C	28.0	8.5	6.5	1874	50	27.5	8

A touring tire designed to fit the needs of many drivers. The Kenetica KR17 offers dependability and safety at an incredible value. It's all-season tread pattern has excellent grip in a variety of harsh conditions, earning it an M&S rating. The random variable pitch tread arrangement significantly reduces noise and the high modulus, low shrinkage carcass enhances driving comfort.

Alpha Numeric Cross Reference Chart

Alpha Numeric	P-Metric	Alpha Numeric	P-Metric
A78-13	P165/80D13	F78-14	P205/75D14
B78-13	P175/80D13	G78-14	P215/75D14
C78-13	P185/80D13	F78-15	P205/75D15
E78-14	P195/75D14	H78-15	P225/75D15

Load Range Conversion Chart

Load Range	Ply	Load Range	Ply
A	2	E	10
B	4	F	12
C	6	G	14
D	8	H	16

Markal E-Z Break



Part No. MAR10B - 10 oz can w/ brush cap
Part No. MAR16B - 16 oz can w/ brush cap
Part No. MAR14A - 14 oz aerosol can

Penetrating Oil



Part No. CYCC-10 - 13 oz can Break-Away
Part No. CYC16-PB - 11 oz spray PB Blaster
Part No. MURF8.0710 11 oz Barracuda Triple Action lubricant

Nitrile Gloves



Part No. GLONTL-M - Medium
Part No. GLONTL-L - Large
Part No. GLONTL-XL - X-Large
Part No. GLONTL-XXL - XX-Large

Trailer Wheels



High Speed Solid White

Part No.	Size	Bolt Pattern	Center Hole (Inches)	Offset (Inches)	Backside Spacing (Inches)	Load Capacity (lb)
WHL7500	8x3.75	4 on 4	2.81	0	2.38	900
WHL7510X	8x3.75	5 on 4.5	2.82	0	2.38	900
WHL7532	8x5.375	5 on 4.5	2.75	.75	2.13	900
WHL7540X	8x7	4 on 4	2.82	0	4.00	900
WHL7550X	8x7	5 on 4.5	2.82	0	4.00	900
WHL7570X	10x6	4 on 4	2.82	0	3.50	1200
WHL7580X	10x6	5 on 4.5	2.82	0	3.50	2000



Eight Spoke - White

Part No.	Size	Bolt Pattern	Center Hole (Inches)	Offset (Inches)	Backside Spacing (Inches)	Load Capacity (lb)
WHL7600X	12x4	4 on 4	2.82	0	2.50	1220
WHL7610X	12x4	5 on 4.5	2.95	0	2.50	1220
WHL7640X	13x4.5	5 on 4.5	3.19	0	2.75	1660
WHL7650X	14x6	5 on 4.5	3.30	0	3.50	1900
WHL7670X	15x6	5 on 4.5	3.30	0	3.50	2600
WHL7684X	15x6	5 on 5	3.30	0	3.50	2600
WHL7680X	15x6	6 on 5.5	4.29	0	3.50	2600
WHL7686X	16x6	6 on 5.5	4.28	0	3.50	3140
WHL7687X	16x6	8 on 6.5	5.15	0	3.50	3760



Modular White with Pin Stripes

Part No.	Size	Bolt Pattern	Center Hole (Inches)	Offset (Inches)	Backside Spacing (Inches)	Load Capacity (lb)
WHL7616	12x4	4 on 4	2.80	-.125	2.38	1045
WHL7617	12x4	5 on 4.5	2.80	-.125	2.38	1220
WHL7641	13x4.5	5 on 4.5	3.30	-.125	2.63	1480
WHL7651	14x6	5 on 4.5	3.30	0	3.50	1870
WHL7671X	15x6	5 on 4.5	3.30	0	3.50	2600
WHL7681	15x6	5 on 5.5	4.29	0	3.55	2830
WHL7682HD	15x6	6 on 5.5	4.28	0	3.5	3080
WHL7683HD	15x6	6 on 5.5	4.29	0	3.55	3080
WHL7690HD	16x6	8 on 6.5	4.90	0	3.55	4480
WHL7691HD	16x6	8 on 6.5	5.15	0	3.50	4480
WHL7681XHD	15x6	6 on 5.5	4.25	0	3.50	3250
WHL7689XHD	16x6	8 on 6.5	5.15	0	3.25	4080

Lawn & Garden Tires



Multi Trac C/S

Note: Lawn & Garden tires are not for highway service or high speed use.

Tubeless tires may be used with a tube.

CARLISLE Multi Trac C/S

Part No.	Size	Ply	Mtd. Dia. (Inches)	Mtd. Width (Inches)	Rim Width (Inches)	Max Load at 10 MPH (lb)	Max PSI	Tire Weight (lb)	Tread Depth (32nds)
TIR18205	18x8.50-8	8	17.7	8.3	7.00	1220	44	13.2	9
TIR18220	18x9.50-8	6	18.2	9.0	7.00	1320	36	11.9	9
TIR18225	20x8.00-8	2	19.4	8.8	6.50	625	12	11.0	9
TIR18242	18x8.50-10	4	18.1	8.3	7.00	795	22	9.8	9
TIR18245	18x10.50-10	4	17.8	10.1	8.00	990	20	12.2	10
TIR18275	23x8.50-12	6	22.6	8.3	7.00	1440	34	18.4	12
TIR18295	23x10.50-12	6	22.6	10.4	8.50	1760	32	21.7	12
TIR18300	26x10.50-12	2	25.2	10.4	8.50	1185	10	23.9	12
TIR18305	26x12.00-12	4	25.2	12.2	8.50	1780	20	26.1	12
TIR18310	26x12.00-12	6	25.2	12.2	8.50	2250	30	29.2	12
TIR18313	26x14.00-12	4	25.5	14.0	10.5	2120	18	31.6	12
TIR18315	24x8.50-14	4	24.0	8.5	7.00	1230	22	17.9	11
TIR18320	25x8.50-14	4	25.0	8.5	7.00	1320	22	20.1	11
TIR18325	25x8.50-14	6	25.0	8.5	7.00	1640	32	23.5	11
TIR18330	27x8.50-15	4	26.6	8.5	7.00	1230	30	25.3	11
TIR18335	27x8.50-15	6	26.6	8.6	7.00	1570	45	25.6	11
TIR18338	27x10.50-15	4	26.9	10.2	8.50	1320	30	29.0	11
TIR18340	27x10.50-15	8	27.0	10.5	8.50	3740	60	32.6	11
TIR18343	29x12.50-15	10	29.0	12.7	10.00	3300	20	39.1	11
TIR18345	31x13.50-15	4	31.5	13.2	10.50	2150	20	46.0	14
TIR18350	36x14.00-15	4	36.0	14.0	10.00	2600	20	59.0	17



Turf Master Plus

CARLISLE Turf Master Plus

Part No.	Size	Ply	Mtd. Dia. (Inches)	Mtd. Width (Inches)	Rim Width (Inches)	Max Load at 10 MPH (lb)	Max PSI	Tire Weight (lb)	Tread Depth (32nds)
TIR3870	22x12.00-12	4	23.0	11.5	9.5	1480	20	22.0	12
TIR3876	23x12.00-12	4	23.9	11.5	9.5	1610	20	22.0	12
TIR3880	24x12.00-12	4	24.9	11.7	9.5	1710	20	22.6	12

Lawn & Garden Tires



Turf Trac R/S

CARLISLE Turf Trac R/S

Part No.	Size	Ply	Mtd. Dia. (Inches)	Mtd. Width (Inches)	Rim Width (Inches)	Max Load at 10 MPH (lb)	Max PSI	Tire Weight (lb)	Tread Depth (32nds)
TIR18346	11x4.00-5	2	10.6	4.0	3.00	210	22	2.4	3
TIR18364	15x6.00-6	2	15.0	6.0	6.0	365	22	3.7	5
TIR18375	16x6.50-8	4	16.0	6.8	5.38	620	28	6.9	6
TIR18385	18x6.50-8	8	17.6	6.6	5.375	1170	58	12.0	6
TIR18395	18x8.50-8	4	17.7	8.1	7.00	815	22	7.3	6
TIR18420	20x10.00-8	4	19.5	9.9	8.00	1190	22	10.5	8
TIR18431	22.5x10.00-8	4	22.6	9.6	8.00	1390	22	15.0	11
TIR18441	25x12.00-9	4	25.7	11.6	9.50	1820	20	17.9	16
TIR18450	20x10.00-10	4	19.6	9.3	8.00	1160	22	10.1	8
TIR18452	20x12.00-10	4	19.6	11.7	8.00	1320	20	13.9	9
TIR18453	22x9.50-10	4	21.7	9.5	7.00	980	14	14.3	10
TIR18454	24x9.50-10	4	24.3	9.8	7.00	1410	22	16.1	10
TIR18456	24x12.00-10	4	24.5	11.5	7.75	1710	20	20.7	10
TIR18475	23x10.50-12	4	22.4	10.1	8.50	1340	20	13.0	7
TIR18480	24x12.00-12	6	23.5	11.0	8.50	2240	32	21.3	10
TIR18485	26x12.00-12	10	25.3	12.4	8.50	3100	52	24.4	8

Carlisle's Turf Trac R/S offers all-around performance with a balanced profile and ample tread depth. Applications range from residential zero turn mowers to utility vehicles. The variety of sizes available corresponds to the many possible uses.

Note: Lawn & Garden tires are not for highway service or high speed use. Tubeless tires may be used with a tube.



D266

DEESTONE Commercial & Turf D266

Part No.	Size	Ply	Mtd. Dia. (Inches)	Mtd. Width (Inches)	Rim Width (Inches)	Max Load (lb)	Max PSI	Tire Weight (lb)	Tread Depth (32nds)
TIR18420I	20x10.00-8	4	19.70	9.70	8.00	1190	22	12.32	8
TIR18451I	20x10.00-10	6	19.70	9.20	8.00	1450	32	14.11	8
TIR18475I	23x10.50-12	4	23.00	9.80	8.50	1340	20	15.90	6

Order by phone (651) 456-5600; Toll free: (800) 328-7400

Lawn & Garden Tires



Turf Master

CARLISLE Turf Master

Part No.	Size	Ply	Mtd. Dia. (Inches)	Mtd. Width (Inches)	Rim Width (Inches)	Max Load at 10 MPH (lb)	Max PSI	Tire Weight (lb)	Tread Depth (32nds)
TIR3804	13x6.50-6	4	13.1	6.28	4.50	460	28	5.4	8
TIR3808	15x6.00-6	4	14.4	6.20	4.50	570	30	4.7	8
TIR3809	15x6.50-8	2	15.0	6.30	5.38	415	14	6.2	8
TIR3812	16x6.50-8	4	16.3	6.40	5.38	620	28	7.0	8
TIR3816	16x7.50-8	4	16.4	7.10	5.38	680	24	8.4	8
TIR3820	18x6.50-8	4	17.5	6.40	5.38	770	28	7.2	9
TIR3822	18x7.50-8	4	17.9	7.25	5.375	805	24	10.0	10
TIR3824	18x8.50-8	4	18.0	8.20	7.00	815	22	10.6	10
TIR3828	18x9.50-8	4	18.1	9.20	7.00	1040	24	10.7	9
TIR3832	20x10.00-8	4	19.6	10.40	7.00	1190	22	14.1	8
TIR3833	20x7.00-8	4	20.5	7.70	6.00	910	26	12.7	10
TIR3834	20x8.00-10	4	20.2	8.10	6.00	910	24	14.2	10
TIR3835	22x10.00-10	4	22.1	9.77	7.00	1360	22	15.8	8
TIR3836	20x10.00-10	4	20.0	8.80	6.00	1160	22	13.6	8
TIR3835	22x10.00-10	4	22.1	9.77	7.00	1360	22	15.8	8
TIR3837	22x10.50-12	4	22.3	10.10	8.50	1295	20	16.8	11
TIR3838	22x11.00-10	4	21.4	10.40	7.00	1485	20	16.1	8
TIR3839	20x10.00-10	6	19.45	9.50	7.00	1430	32	15.7	10
TIR3840	23x8.50-12	4	22.9	8.40	7.00	1120	22	15.9	10
TIR3844	23x9.50-12	4	23.6	9.80	7.00	1120	22	15.9	11
TIR3848	23x10.50-12	4	22.8	10.00	8.50	1340	20	16.8	11
TIR3851	24x9.50-12	4	23.6	9.60	7.00	1500	24	19.9	9
TIR3852	24x12.00-12	4	23.3	11.40	8.50	1700	20	19.7	11

Our Turf Master line is the choice for professional users requiring the highest performance and dependability from equipment. These commercial grade tires feature our most durable tread compound with deep tread elements in a profile optimized for stability and traction. Non-highway service.

Lawn & Garden Tires



Flat Free Turf



Turf Saver

Flat Free Turf Assemblies

Part No.	Size	Mtd. Dia. (Inches)	Mtd. Width (Inches)	Max Load (lb)	Tire Weight (lb)	Shaft Size	Hub Size
MTA7M0021	13x5.00-6	13.3	4.5	400	8.5	3/4”	3” Centered
MTA7M0022	13x6.50-6	13.5	6.2	400	12.0	3/4”	3” Centered
MTA7M0024	15x6.50-6	13.9	6.3	500	12.5	3/4”	3” Centered

CARLISLE Turf Saver

Part No.	Size	Ply	Mtd. Dia. (Inches)	Mtd. Width (Inches)	Rim Width (Inches)	Max Load (lb)	Max PSI	Tire Weight (lb)	Tread Depth (32nds)
TIR2977	9x3.50-4	4	8.8	3.6	2.50	260	50	2.2	5
TIR3010	4.10-4	2	10.8	3.8	2.50	230	24	2.7	7
TIR2990	11x4.00-4	2	11.2	4.2	2.50	215	22	3.0	5
TIR3020	11x4.00-5	2	10.8	4.0	3.00	210	22	2.8	5
TIR3060	13x5.00-6	2	12.9	4.7	3.50	295	20	4.2	5
TIR3065	13x5.00-6	4	12.9	4.8	3.50	440	40	3.4	5
TIR3120	13x6.50-6	2	13.2	6.5	4.50	305	14	4.2	6
TIR3160	15x6.00-6	2	14.5	6.2	4.50	365	14	5.6	5
TIR3200	4.80-8	2	16.3	5.0	3.75	435	20	4.9	5
TIR3248	16x6.50-8	2	16.2	6.6	5.38	385	12	5.95	5
TIR3285	16x7.50-8	2	16.5	7.1	5.38	475	12	7.6	5
TIR3300	18x6.50-8	2	17.2	6.5	5.38	515	14	7.6	6
TIR3306	18x7.50-8	4	18.0	7.5	5.38	835	26	8.7	9
TIR3320	18x8.50-8	2	17.8	8.3	7.00	515	10	9.0	7
TIR3360	18x8.50-8	4	18.0	8.2	7.00	815	22	10.3	7
TIR3380	18x9.50-8	2	17.7	9.5	7.00	695	12	9.8	7
TIR3440	18x9.50-8	4	18.1	9.6	7.00	1040	24	10.7	7
TIR3442	18x9.50-8	6	18.5	9.5	7.00	1320	36	11.7	7
TIR3444	20x8.00-8	2	19.1	9.1	7.00	600	10	9.6	7
TIR3455	20x10.00-8	2	19.6	10.1	7.00	750	10	13.0	4
TIR3470	20x8.00-10	4	20.0	7.9	6.00	895	24	11.7	8
TIR3490	20x10.00-10	4	20.8	8.8	6.00	1225	24	12.7	8
TIR3501	22x9.50-12	2	21.3	8.9	7.00	870	14	13.0	7
TIR3520	23x8.50-12	2	23.1	8.5	7.00	705	10	12.9	7
TIR3580	23x9.50-12	2	23.2	9.5	7.00	920	12	14.2	7
TIR3600	23x10.50-12	2	22.6	10.5	8.50	890	10	15.2	7
TIR3630	23x10.50-12	4	22.8	10.3	8.50	1340	20	16.5	7
TIR3633	24x12.00-12	2	23.0	11.6	8.50	1135	10	18.7	7

With its classic square shouldered design, Carlisle’s Turf Saver is the market leader for residential riding lawn mowers worldwide. The flat profile and chevron tread provide excellent traction. Turf friendly design and breadth of line make it versatile in both application and fitment. Non-highway service.

Lawn & Garden Tires



Turf Armor

CARLISLE Turf Armor

Part No.	Size	Ply	Mtd. Dia. (Inches)	Mtd. Width (Inches)	Rim Width (Inches)	Max Load at 10 MPH (lb)	Max PSI	Tire Weight (lb)	Tread Depth (32nds)
TIR3926	20x8.00-8	4	20.0	8.4	7.0	965	22	11.75	9.0
TIR3931	20x10.00-8	4	20.10	10.25	7.0	1200	22	15.50	10.0
TIR3976	20x12.00-12	4	23.75	11.7	9.5	1710	20	22.00	12.0

The Turf Armor's updated, rugged styling features a unique multi-angled tread pattern. The Turf Armor tread pattern is designed to fully connect with the ground resulting in evenly distributed ground pressure for excellent traction.



Ultra Trac

CARLISLE Ultra Trac

Part No.	Size	Ply	Mtd. Dia. (Inches)	Mtd. Width (Inches)	Rim Width (Inches)	Max Load at 10 MPH (lb)	Max PSI	Tire Weight (lb)	Tread Depth (32nds)
TIR18555	24x13.00-12	4	23.2	13.0	10.5	1730	18	26.3	8
TIR18560	24x13.00-12	6	22.7	13.0	10.5	2240	28	28.3	8
TIR18565	26.5x14.00-12	4	26.5	14.4	11.0	2170	18	30.6	8
TIR18570	29x14.00-15	6	29.0	14.0	11.0	1710	30	44.5	11

The Carlisle Ultra Trac is the right approach for those specialized applications where high flotation is essential. Ultra Tracs are wide with a flat footprint and reduced void in the tread. These features yield low ground pressure and good traction while preserving the turf. Ultra Trac tires are most often utilized on golf and grounds maintenance equipment. Non-highway service.



Turf Pro R-3

CARLISLE Turf Pro R-3

Part No.	Size	Ply	Mtd. Dia. (Inches)	Mtd. Width (Inches)	Rim Width (Inches)	Max Load at 25 MPH (lb)	Max PSI	Tire Weight (lb)	Tread Depth (32nds)
TIR18590	31x15.50-15	8	30.6	14.2	13.00	2760	45	58.5	18
TIR3890	13.6-16	4	38.0	14.2	12.00	1570	14	84.1	24



Turf-CTR

CARLISLE Turf-CTR

Part No.	Size	Ply	Mtd. Dia. (Inches)	Mtd. Width (Inches)	Rim Width (Inches)	Max Load at 10 MPH (lb)	Max PSI	Tire Weight (lb)	Tread Depth (32nds)
TIR3510	22x11.00-8	4	22.4	10.8	9.0	955	10	12.8	8

Lawn & Garden Tires



S374

Transmaster Ultra Turf S374

Part No.	Size	Ply	Mtd. Dia. (Inches)	Mtd. Width (Inches)	Rim Width (Inches)	Max Load at 10 MPH (lb)	Max PSI	Tire Weight (lb)	Tread Depth (32nds)
TIR18295D	23x10.50-12	6	23	10.5	8.5	1760	32	18.66	12.5



D265

DEESTONE Lawn & Turf D265

Part No.	Size	Ply	Mtd. Dia. (Inches)	Mtd. Width (Inches)	Rim Width (Inches)	Max Load (lb)	Max PSI	Tire Weight (lb)	Tread Depth (32nds)
TIR2991I	11x4.00-4	4	10.80	4.00	2.50	326	33	2.80	5
TIR3011I	4.10/3.50-4	4	10.80	3.90	3.25	350	50	2.58	4
TIR3021I	11x4.00-5	4	11.00	3.90	3.50	330	46	2.59	5
TIR3161I	15x6.00-6	4	14.90	6.20	4.50	570	28	5.82	5
TIR3250I	16x6.50-8	4	15.90	6.60	5.50	618	28	7.52	6
TIR3286I	16x7.50-8	4	16.20	7.00	5.50	710	24	7.39	5
TIR3302I	18x6.50-8	4	17.60	6.90	5.38	770	24	8.96	6
TIR3360I	18x8.50-8	4	17.70	8.00	7.00	815	22	10.08	7
TIR3440I	18x9.50-8	4	17.70	8.70	7.30	1035	24	9.63	7
TIR3445I	20x8.00-8	4	19.40	8.60	7.00	880	24	9.97	6
TIR3456I	20x10.00-8	4	19.50	9.10	7.00	1190	22	12.32	8
TIR3490I	20x10.00-10	4	20.50	9.60	8.00	1025	28	12.77	7
TIR3521I	23x8.50-12	4	22.80	8.10	7.00	1115	22	14.11	7
TIR3581I	23x9.50-12	4	23.00	8.90	7.00	1360	20	14.78	7
TIR3630I	23x10.50-12	4	23.20	9.90	8.50	1340	20	17.70	8
TIR3634I	24x12.00-12	4	23.30	11.40	8.50	1135	10	18.70	8
TIR3637I	26x12.00-12	6	25.50	12.10	10.50	2680	30	24.25	8



DI-5005

Duro Commercial Turf DI-5005

Part No.	Size	Ply	Mtd. Dia. (Inches)	Mtd. Width (Inches)	Rim Width (Inches)	Max Load at 10 MPH (lb)	Max PSI	Tire Weight (lb)	Tread Depth (32nds)
TIR8545	23x8.50-12	6	22.7	8.5	7	1440	34	18.1	8

Order by phone (651) 456-5600; Toll free: (800) 328-7400

Lawn & Garden Tires



Soft Turf

TRANSmaster Soft Turf S365

Part No.	Size	Ply	Mtd. Dia. (Inches)	Mtd. Width (Inches)	Rim Width (Inches)	Max Load (lb)	Max PSI	Tire Weight (lb)	Tread Depth (32nds)
TIR3021D	11x4.00-5	4	10.5	3.9	2.5	330	46	3.0	4
TIR3065D	13x5.00-6	4	12.7	4.5	3.25	440	40	4.0	6
TIR3125D	13x6.50-6	4	13.1	6.3	4.5	460	25	5.2	6
TIR3161D	15x6.00-6	4	14.7	6.1	4.5	570	30	5.4	6
TIR3250D	16x6.50-8	4	16.2	6.3	5.38	620	28	6.4	9
TIR3360D	18x8.50-8	4	18.0	8.6	7.0	814	22	11.0	9
TIR3445D	20x8.00-8	4	19.5	8.8	7.0	945	22	10.7	8
TIR3456D	20x10.00-8	4	20.5	10.2	7.0	1190	22	12.1	8
TIR3521D	23x8.50-12	4	22.6	8.4	7.0	1100	22	15.4	8.9



Super Turf

Kenda Super Turf K500

Part No.	Size	Ply	Mtd. Dia. (Inches)	Mtd. Width (Inches)	Rim Width (Inches)	Max Load (lb)	Max PSI	Tire Weight (lb)	Tread Depth (32nds)
TIR432200	18x8.50-8	4	17.8	8.5	7	815	22	9.16	9.3
TIR432205	18x8.50-8	6	17.8	8.5	7	1050	34	9.95	9.4
TIR432210	18x9.50-8	4	18.2	9.3	7	1040	24	12.01	8.2
TIR432215	18x9.50-8	6	18.7	9.4	7	1320	36	12.19	8.3
TIR432220	20x8.00-8	4	19.6	8.7	7	905	22	9.7	11
TIR432230	20x10.50-8	4	20	10.2	7	1190	22	14.55	9
TIR432240	22x10.50-12	4	22	10.4	8	1340	22	17.4	11
TIR432250	23x10.50-12	4	22.8	10.4	8.5	1340	22	18.86	12
TIR432255	23x10.50-12	6	22.9	10.4	8.5	1760	32	20.58	12
TIR432265	24x14.00-12	4	23.4	11.8	9.5	1700	20	21.03	8.7
TIR432270	24x12.00-12	6	23.4	11.5	9.5	2260	32	21.03	8.7
TIR432275	24x12.00-12	8	23.5	11.5	8.5	2925	50	22	8.7
TIR432295	26x12.00-12	8	26.3	12.6	10.5	3050	50	32.07	12

The K500 Super Turf is the premier tire for turf applications and is the OEM choice for many ZTR and high-end commercial mower manufacturers.

Lawn & Garden Tires



Lawn Master

OTR HBR Lawn Master

Part No.	Size	Ply	Mtd. Dia. (Inches)	Mtd. Width (Inches)	Rim Width (Inches)	Max Load at 10 MPH (lb)	Max PSI	Tire Weight (lb)	Tread Depth (32nds)
TIR2408	24x12.00-14	4	23.94	12.00	10.5	1820	20	23	8
TIR2410	26x12.00-16	4	26.1	12.00	10.5	1820	20	25	8



Grass Master

OTR Grass Master

Part No.	Size	Ply	Mtd. Dia. (Inches)	Mtd. Width (Inches)	Rim Width (Inches)	Max Load at 10 MPH (lb)	Max PSI	Tire Weight (lb)	Tread Depth (32nds)
TIR2350	25x12.00-12	4	25.0	12.5	10.50	1740	20	25.3	11

The OTR Grassmaster is designed with a high traction tread and a long wear rubber compound.



K505

Kenda Turf K505

Part No.	Size	Ply	Mtd. Dia. (Inches)	Mtd. Width (Inches)	Rim Width (Inches)	Max Load at 10 MPH (lb)	Max PSI	Tire Weight (lb)	Tread Depth (32nds)
TIR433265	26x12.00-12	4	25.4	12.1	10.5	1780	20	26.45	12
TIR433290	29x12.00-15	6	29.8	11.8	10.0	1760	20	38.1	12

Like our K500, the K505 has siped lugs for enhanced traction and less turf damage. The alignment of the lugs on this tire aids with the self-cleaning of the tire tread to prevent slippage. The additional tread depth and tread pattern provide a very durable tire with great traction, including side hill mowing. The K505 is a great tire for a variety of applications



Straight Rib

CARLISLE Straight Rib

Part No.	Size	Ply	Mtd. Dia. (Inches)	Mtd. Width (Inches)	Rim Width (Inches)	Max Load (lb)	Max PSI	Tire Weight (lb)	Tread Depth (32nds)
TIR3090	13x5.00-6	4	12.9	4.7	3.5	440	40	2.5	4
TIR3095	13x6.50-6	4	13.0	5.9	4.5	460	28	4.0	5
TIR3183	15x6.00-6	4	14.5	6.1	4.5	570	30	3.9	5
TIR3261	16x6.50-8	4	16.2	6.4	5.38	620	28	5.2	5
TIR3420	18x9.50-8	4	17.7	9.3	7.0	1040	24	9.4	5
TIR3424	20x10.00-10	4	20.0	8.7	6.0	1160	22	12.8	8
TIR3690	26x12.00-12	4	25.0	11.7	10.5	1780	20	22.3	11

Order by phone (651) 456-5600; Toll free: (800) 328-7400

Lawn & Garden Tires



D837

DEESTONE Rib D837

Part No.	Size	Ply	Mtd. Dia. (Inches)	Mtd. Width (Inches)	Rim Width (Inches)	Max Load at 10 MPH (lb)	Max PSI	Tire Weight (lb)	Tread Depth (32nds)
TIR3183I	15x6.00-6	4	14.40	6.10	4.50	565	30	5.15	4
TIR3184I	15x6.00-6	6	14.40	6.10	4.50	782	46	5.20	4
TIR3266I	18x8.50-8	4	17.70	8.40	7.00	825	22	7.00	7



S317

TRANSmaster Rib S317

Part No.	Size	Ply	Mtd. Dia. (Inches)	Mtd. Width (Inches)	Rim Width (Inches)	Max Load at 10 MPH (lb)	Max PSI	Tire Weight (lb)	Tread Depth (32nds)
TIR3041D	11x4.00-5	4	10.6	4.0	3.25	326	46	2.8	4
TIR3090D	13x5.00-6	4	12.4	4.6	3.50	440	40	3.2	4
TIR3095D	13x6.50-6	4	12.8	5.9	4.25	308	28	5.2	5
TIR3183D	15x6.00-6	4	14.4	6.0	4.25	352	30	5.0	5
TIR3261D	16x6.50-6	4	16.2	6.7	5.38	620	28	5.7	7
TIR3266D	18x8.50-8	4	17.7	8.4	7.0	815	22	8.9	7



Smooth

CARLISLE Smooth

Part No.	Size	Ply	Mtd. Dia. (Inches)	Mtd. Width (Inches)	Rim Width (Inches)	Max Load at 10 MPH (lb)	Max PSI	Tire Weight (lb)
TIR2978	8x3.00-4	4	8.3	2.9	2.50	120	30	1.7
TIR2980	9x3.50-4	4	8.7	3.7	2.50	260	50	2.3
TIR3044	11x6.00-5	4	11.1	6.53	3.25	450	42	4.4
TIR3045	11x4.00-5	4	11.0	4.0	3.00	325	46	3.2
TIR3046	13x5.00-6	4	12.7	4.8	4.50	440	40	4.1
TIR3047	13x6.50-6	4	12.9	5.9	3.75	460	28	4.0
TIR3222	4.80-8	4	16.8	4.8	3.75	760	70	4.1
TIR3450	18x9.50-8	4	17.8	8.7	7.00	1040	24	8.3
TIR18891	18x10.50-10	4	18.4	9.25	7.75	1100	24	14
TIR18895	20x10.00-10	2	19.6	9.5	8.00	815	12	11.9



Flat Free Smooth

Flat Free Smooth Assemblies

Part No.	Size	Mtd. Dia. (Inches)	Mtd. Width (Inches)	Max Load (lb)	Tire Weight (lb)	Shaft Size	Hub Size
MTA7M0006	9x3.50-4	9.3	3.3	300	4.0	3/4”	4” Centered
MTA7M0014	11x4.00-5	10.9	4.0	350	5.5	3/4”	5” Centered
MTA30346	13x5.00-6	13.3	4.5	400	8.5	3/4”	3” Centered
MTA30256	13x6.50-6	13.5	6.2	400	12.0	3/4”	3” Centered

Low Speed Tires



Sawtooth

CARLISLE Sawtooth

Part No.	Size	Ply	Mtd. Dia. (Inches)	Mtd. Width (Inches)	Rim Width (Inches)	Max Load at 10 MPH (lb)	Max PSI	Tire Weight (lb)	Tread Depth (32nds)
TIR2020	2.80-4 TT	4	9.0	2.9	2.50	180	50	1.7	4
TIR3003	4.10-4	2	10.6	3.6	2.50	230	24	2.5	4
TIR3005	4.10-4	4	10.5	3.8	2.50	350	50	2.2	4
TIR3057	4.10-6	4	13.0	4.2	3.25	495	85	3.3	6
TIR3146	5.30-6	6	14.6	5.3	3.50	885	95	5.1	6
TIR3212	4.80-8	2	16.0	4.6	3.75	510	35	5.1	6

TT = Tube Type

The Carlisle Sawtooth tire delivers smooth rolling performance for utility based equipment. Commonly used for wheelbarrows, pressure washers, generators, hand trucks and lawn equipment. The Sawtooth tire is utilized in various applications.



S389

TRANSmaster Sawtooth S389

Part No.	Size	Ply	Mtd. Dia. (Inches)	Mtd. Width (Inches)	Rim Width (Inches)	Max Load at 10 MPH (lb)	Max PSI	Tire Weight (lb)	Tread Depth (32nds)
TIR3005D	4.10/3.50-4	4	10.4	3.90	2.50	352	50	3.0	5
TIR3057D	4.10/3.50-6	4	12.7	3.70	3.25	445	50	3.0	5

Pneumatic Sawtooth Assemblies

Part No.	Size	Mtd. Dia. (Inches)	Mtd. Width (Inches)	Max Load (lb)	Tire Weight (lb)	Shaft Size	Hub Size
MTA7M0037	4.10/3.50-4	10.3	3.3	300	4.0	3/4” or 5/8”	2.25” Centered



Flat Free Sawtooth

Flat Free Sawtooth Assemblies

Part No.	Size	Mtd. Dia. (Inches)	Mtd. Width (Inches)	Max Load (lb)	Tire Weight (lb)	Shaft Size	Hub Size
MTA7M0005	2.80/2.50-4	8.6	3.1	275	3.0	1/2”	3” Centered
MTA483811	4.10/3.50-4	10.3	3.3	300	4.0	3/4” or 5/8”	2.25” Centered
MTA30031P	4.10/3.50-4	10.3	3.3	300	4.0	3/4”	3.5” Centered

Low Speed Tires



Wheelbarrow (Tire Only)

CARLISLE Wheelbarrow Tire

Part No.	Size	Ply	Mtd. Dia. (Inches)	Mtd. Width (Inches)	Rim Width (Inches)	Max Load at 10 MPH (lb)	Max PSI	Tire Weight (lb)	Tread Depth (32nds)
TIR2450	4.00-6	2	13.4	4.0	2.50	485	29	2.0	2
TIR3225	4.80-8	4	16.3	4.5	3.75	765	70	3.4	2



S379 (Tire Only)

Wheelbarrow Tire & Wheel Assemblies

Part No.	Size	Ply	Mtd. Dia. (Inches)	Mtd. Width (Inches)	Max Load (lb)	Tire Weight (lb)	Shaft Size	Hub Size
TIR2526	4.80-8	4	16.5	4.6	765	4.1	5/8”	6” Centered

TRANSmaster Wheelbarrow Tire S379

Part No.	Size	Ply	Mtd. Dia. (Inches)	Mtd. Width (Inches)	Rim Width (Inches)	Max Load at 10 MPH (lb)	Max PSI	Tire Weight (lb)	Tread Depth (32nds)
TIR2451D	4.00-6	4	13.2	4.0	2.5	485	50	1.9	4
TIR2514D	3.50-8	2	15.0	3.5	2.5	320	30	2.0	4
TIR2580D	4.80/4.00-8	4	15.9	4.3	2.5	484	50	3.0	4



Flat Free Rib

Flat Free Rib Assemblies

Part No.	Size	Mtd. Dia. (Inches)	Mtd. Width (Inches)	Max Load (lb)	Tire Weight (lb)	Shaft Size	Hub Size
MTA7M0035	20x2	19.48	1.85	250	4.5	3/4” or 5/8”	2.4375” Centered
MTA7M0023	4.80/4.00-8	14.5	3.2	300	7.5	3/4” or 5/8”	3” Centered
MTA7M0030	4.80/4.00-8	15.5	3.6	500	8.0	5/8”	6” Centered



Castle Tread

Pneumatic Castle Tread Assemblies

Part No.	Size	Mtd. Dia. (Inches)	Mtd. Width (Inches)	Max Load (lb)	Tire Weight (lb)	Shaft Size	Hub Size
MTA7M0039	4.80/4.00-8	14.5	3.2	300	7.5	3/4” or 5/8”	3” Centered

Traction Tires

For Riding Mowers, Garden Tractors, Tillers, Snowblowers, Golf Carts, and Utility Vehicles



Stud

CARLISLE Stud

Part No.	Size	Ply	Mtd. Dia. (Inches)	Mtd. Width (Inches)	Rim Width (Inches)	Max Load at 10 MPH (lb)	Max PSI	Tire Weight (lb)	Tread Depth (32nds)
TIR3002	4.10-4	2	10.6	3.6	2.50	230	24	2.6	4
TIR3056	4.10-6	2	12.5	3.9	3.25	290	24	3.2	5
TIR3214	4.80-8	2	16.4	4.7	3.75	435	20	4.8	6
TIR3215	4.80-8	4	16.3	4.7	3.75	670	42	5.8	6

Stud tires are used for small industrial product applications. Hand trucks, industrial carts and pressure washers are examples of equipment that utilize these tires. The Stud pattern has an aggressive appearance with excellent traction. Non-highway service.



S356

TRANSmaster Stud S356

Part No.	Size	Ply	Mtd. Dia. (Inches)	Mtd. Width (Inches)	Rim Width (Inches)	Max Load at 10 MPH (lb)	Max PSI	Tire Weight (lb)	Tread Depth (32nds)
TIR3002D	4.10/3.50-4	4	10.6	3.7	2.5	352	50	2.4	5
TIR3059D	4.10/3.50-6	4	12.7	3.8	3.75	445	50	2.8	5
TIR3215D	4.80/4.00-8	4	16.2	4.8	3.75	670	50	4.6	7

With its aggressive appearance, the Stud tire grips on a multitude of terrains including soft dirt and snow. Commonly used for utitlity applications, such as hand truck, power washers and industrial carts.



K352

Kenda Stud K352

Part No.	Size	Ply	Mtd. Dia. (Inches)	Mtd. Width (Inches)	Rim Width (Inches)	Max Load at 10 MPH (lb)	Max PSI	Tire Weight (lb)	Tread Depth (32nds)
TIR3059I	4.10/3.50-6	4	12.40	3.60	2.75	440	50	2.9	4



Flat Free Knobby

Flat Free Knobby Assemblies

Part No.	Size	Mtd. Dia. (Inches)	Mtd. Width (Inches)	Max Load (lb)	Tire Weight (lb)	Shaft Size	Hub Size
MTA7M0027	4.80/4.00-4	14.5	3.2	300	7.5	5/8”	6” Centered

The flat free 4.80/4.00-8 inch tire is a contractor grade wheelbarrow tire. Airless tires have the same bounce, feel, cushioning, and performance as a regular air-filled tire.

Order by phone (651) 456-5600; Toll free: (800) 328-7400

Traction Tires



X-Trac

CARLISLE X-Trac

Part No.	Size	Ply	Mtd. Dia. (Inches)	Mtd. Width (Inches)	Rim Width (Inches)	Max Load at 10 MPH (lb)	Max PSI	Tire Weight (lb)	Tread Depth (32nds)
TIR3705	13x4.00-6	2	12.5	4.0	3.25	280	22	3.1	17
TIR3711	4.80-8	2	16.6	6.0	5.38	410	14	7.0	17
TIR3713	16x6.50-8	2	16.5	6.1	5.38	415	14	7.3	17

Excellent for snow throwing equipment and other applications requiring aggressive traction. Features angled center lugs for maximum bite with squared prominent edge lugs for traction across the entire face of the tire.



Snow Hog

CARLISLE Snow Hog

Part No.	Size	Ply	Mtd. Dia. (Inches)	Mtd. Width (Inches)	Rim Width (Inches)	Max Load at 10 MPH (lb)	Max PSI	Tire Weight (lb)	Tread Depth (32nds)
TIR3048	4.10-6	2	12.8	4.0	3.25	290	24	3.2	14
TIR3113	15x5.00-6	2	14.8	5.0	3.50	405	20	4.8	14
TIR3210	4.80-8	2	16.2	4.7	3.75	435	20	5.3	14
TIR3262	16x6.50-8	2	16.3	6.2	5.38	415	14	6.6	14
TIR3264	18x6.50-8	4	17.3	6.6	5.38	770	28	7.5	14

With its distinctive "X"" shaped tread elements, the Carlisle Snow Hog stands out from the crowd. It is primarily used on snow throwers but can be considered whenever superior traction is needed.



AT101 Chevron

CARLISLE AT101 Chevron

Part No.	Size	Ply	Mtd. Dia. (Inches)	Mtd. Width (Inches)	Rim Width (Inches)	Max Load at 10 MPH (lb)	Max PSI	Tire Weight (lb)	Tread Depth (32nds)
TIR18850	21x11.00-8	4	21.2	10.9	8.5	1430	22	14.5	15
TIR18855	21X11.00-10	4	20.9	10.4	8.5	1380	22	15.5	15
TIR18860	24X12.00-12	4	23.8	12.2	9.5	1700	20	20.9	15

The AT101 Chevron is a specialty lug design with bars that taper in the shoulder area. This feature, along with muted lug depth, allows it to be used as a drive tire for zero turn mowers when extra traction is needed. Non-highway service.



HF252

Duro HF-252

Part No.	Size	Ply	Mtd. Dia. (Inches)	Mtd. Width (Inches)	Rim Width (Inches)	Max Load (lb)	Max PSI	Tire Weight (lb)	Tread Depth (32nds)
TIR8450	6.00-12	4	25.0	6.1	4.00	715	26	15.0	29

Traction Tires

The All-American Carlisle Traction Tires, with their bar tread design, put power to the ground for equipment that demands pure traction in snow, hard and loose soil.



Tru Power

CARLISLE Tru Power

Part No.	Size	Ply	Mtd. Dia. (Inches)	Mtd. Width (Inches)	Rim Width (Inches)	Max Load at 10 MPH (lb)	Max PSI	Tire Weight (lb)	Tread Depth (32nds)
TIR18642	18x8.50-10	4	18.1	7.6	6.00	830	22	10.0	16
TIR18647	6-12	4	22.7	5.7	5.00	590	28	12.1	20
TIR18650	23x8.50-12	4	22.4	8.2	7.00	1115	22	16.3	16
TIR18652	23x10.50-12	4	23.0	9.7	8.50	1340	20	21.0	20
TIR18655	26x12.00-12	4	25.6	12.3	8.50	1780	20	30.1	20
TIR18665	26x12.00-12	8	25.6	12.3	8.50	2740	42	34.8	20
TIR18675	29x12.50-15	6	29.3	11.6	10.00	1710	30	41.9	22
TIR18680	31x15.50-15	8	31.4	15.1	13.00	2760	45	71.5	24

Super Lug



Power Trac

CARLISLE Super Lug/Power Trac Tread

Part No.	Size	Tread Design	Ply	Mtd. Dia. (Inches)	Mtd. Width (Inches)	Rim Width (Inches)	Max Load at 10 MPH (lb)	Max PSI	Tire Weight (lb)	Tread Depth (32nds)
TIR3100	13x5.00-6	SL	2	13.1	4.5	3.50	295	20	4.2	14
TIR3052	14x4.50-6	SL	2	14.5	4.6	3.25	320	20	5.0	12
TIR3221	4.80-8	PT	2	16.1	4.0	2.50	435	20	6.2	11
TIR3226	16x6.50-8	SL	4	16.2	6.3	5.38	620	28	7.5	18
TIR3400	18x9.50-8	SL	2	18.1	8.8	7.00	695	12	11.9	20
TIR3404	20x10.00-8	SL	4	20.1	9.7	7.00	1190	22	17.3	21

SL = Super Lug **PT = Power Trac**



D405

D402

D407

DEESTONE Lug/Agriculture

Part No.	Size	Tread Design	Ply	Mtd. Dia. (Inches)	Mtd. Width (Inches)	Rim Width (Inches)	Tire Weight (lb)	Tread Depth (32nds)
TIR3223I	4.80/4.00-8	D402	4	16.7	4.3	3.00	6.4	14
TIR3226I	16x6.50-8	D407	4	15.6	6.5	5.38	8.0	12
TIR18651I	23x8.50-12	D405	6	22.6	8.4	7.00	17.0	18
TIR18653I	23x10.50-12	D405	6	22.8	10.4	8.50	22.0	18
TIR18660I	26x12.00-12	D405	6	25.4	11.6	10.50	30.0	22

Order by phone (651) 456-5600; Toll free: (800) 328-7400

Golf Cart Tires



Links

CARLISLE Links

Part No.	Size	Ply	Mtd. Dia. (Inches)	Mtd. Width (Inches)	Rim Width (Inches)	Max Load at 10 MPH (lb)	Max PSI	Tire Weight (lb)	Tread Depth (32nds)
TIR3315	18x8.50-8	4	17.4	8.5	7	815	22	13.2	10



Fairway Pro

CARLISLE Fairway Pro

Part No.	Size	Ply	Mtd. Dia. (Inches)	Mtd. Width (Inches)	Rim Width (Inches)	Max Load at 10 MPH (lb)	Max PSI	Tire Weight (lb)	Tread Depth (32nds)
TIR3351	18x8.50-8	4	18.2	8.4	7	815	22	11.8	10



Tour Max

CARLISLE Tour Max

Part No.	Size	Load Range	Mtd. Dia. (Inches)	Mtd. Width (Inches)	Rim Width (Inches)	Max Load at 10 MPH (lb)	Max PSI	Tire Weight (lb)	Tread Depth (32nds)
TIR3355	205/50-10	B	18.3	7.8	6.0	675	30	12.0	10

The Tour Max is a low profile, smooth riding tire designed primarily for golf cars and closed community vehicles. The tread pattern, rubber compound and tire construction provide maxium durability and ride comfort on hard surface paths.



D270

DEESTONE D270

Part No.	Size	Ply	Mtd. Dia. (Inches)	Mtd. Width (Inches)	Rim Width (Inches)	Max Load at 10 MPH (lb)	Max PSI	Tire Weight (lb)	Tread Depth (32nds)
TIR3218I	18x8.50-8	4	17.9	8.0	7.0	815	22	10.53	8



K389

Kenda Hole-N-1 K389

Part No.	Size	Ply	Mtd. Dia. (Inches)	Mtd. Width (Inches)	Rim Width (Inches)	Max Load at 10 MPH (lb)	Max PSI	Tire Weight (lb)	Tread Depth (32nds)
TIR426400	18X8.50-8	4	17.6	8.5	7	815	22	10.15	9.1
TIR426420	20x9.00-12	6	20	8.15	7	1260	32	14.6	10.0



S367

TRANSmaster Greensaver S367

Part No.	Size	Ply	Mtd. Dia. (Inches)	Mtd. Width (Inches)	Rim Width (Inches)	Max Load at 10 MPH (lb)	Max PSI	Tire Weight (lb)	Tread Depth (32nds)
TIR3218D	18x8.50-8	4	17.9	8.1	7.0	815	22	10.1	8

Designed to tackle your golfing and garden activities with minimal effort, the Greensaver Sawtooth is the ideal tire for your utility equipment and golf cart needs. Gentle on lawns, yet tough enough to handle your daily task.

Golf Cart Tires & Tire Chains



K399

Kenda Pro Tour K399

Part No.	Size	Ply	Mtd. Dia. (Inches)	Mtd. Width (Inches)	Rim Width (Inches)	Max Load at 10 MPH (lb)	Max PSI	Tire Weight (lb)	Tread Depth (32nds)
TIR454375	205/50-10	4	18.3	7.7	6.0	1010	30	10.0	8
TIR454475	205/50R10	4	18.4	7.4	6.0	665	30	11.0	6

PEERLESS



Snowblower & Garden Tractor Tire Chains

Part No.	Cross Chain Spacing	Size				
CHA1060456	2- Link	4.10/3.50-4	3.40/3.00-5			
CHA1060856	2 - Link	12x3.25 4.10/3.50-8	12.25x3.50	11x4-4	12x4-6	4.10/3.50-6
CHA1061056	2 - Link	5.30/4.50-6	14x5.00-6	14x5.30-6	15x3.50-6	13x4-8
CHA1061256	2 - Link	12x7-4 13x4-6	13x4.1 13x5.00-6	13x4.00-5 13x5.00-7	10x6-6 5.3x12	12.5x4.50-6
CHA1061556	2 - Link	4.00/4.80-8	4.8x12			
CHA1061756	2 - Link	14x5.50-5	15x5.00-6	15x6.00-6		
CHA1062055	4 - Link	5.00/5.70-8	16x5.50-8	16x6.50-8		
CHA1062056	2 - Link	5.00/5.70-8	16x5.50-8	16x6.50-8		
CHA1062156	2 - Link	16x7.50-8	18x8.50-8			
CHA1062256	2 - Link	18x9.50-8	19x9.50-8	18x8.50-10		
CHA1062655	4 - Link	20x8.00-8	20x9.00-8	20x8.00-10	21x7-10	20x7-12
CHA1062656	2 - Link	20x8.00-8	20x9.00-8	20x8.00-10	21x7-10	20x7-12
CHA1062755	4 - Link	20x10.00-8	22x10-8	20x9.00-10	20x10.00-10	21x8-10
CHA1062756	2 - Link	20x10.00-8	22x10-8	20x9.00-10	20x10.00-10	21x8-10
CHA1062955	4 - Link	22x8-10	22x9-12	23x6.50-12	23x8.50-12	8x12
CHA1062956	2 - Link	22x8-10	22x9-12	23x6.50-12	23x8.50-12	8x12
CHA1063155	4 - Link	22x11.00-8	22x11-10	23x10.00-12	23x10.50-12	24x9.50-12
CHA1063156	2 - Link	22x11.00-8	22x11-10	23x10.00-12	23x10.50-12	24x9.50-12
CHA1063455	4 - Link	25x10-8 26x12-12	24x10.50-12	24x13-12	26x10-12	26x11-12
CHA1063456	2 - Link	25x10-8 26x12-12	24x10.50-12	24x13-12	26x10-12	26x11-12
CHA1063955	4 - Link	24x12-10	24x12-12			
CHA1063956	2 - Link	24x12-10	24x12-12			

***Partial listing of tire sizes** ***Sold by the pair.**

Order by phone (651) 456-5600; Toll free: (800) 328-7400

Bias Ply ATV Tires



AT489

CARLISLE AT489

Part No.	Size	Ply	Mtd. Dia. (Inches)	Mtd. Width (Inches)	Rim Width (Inches)	Max Load (lb)	Max PSI	Tire Weight (lb)	Tread Depth (32nds)
TIR18007	AT22x11-10	4	22.8	10.2	9.00	625	12	15.4	19
TIR18010	AT23x7-10	2*	22.7	6.5	5.50	240	5	12.4	19
TIR18021	24x9.50-10	4	24.0	9.5	7.75	870	22	18.5	19
TIR18025	AT24x11-10	3*	24.0	9.7	9.00	440	7	17.9	19
TIR18032	24x12.00-10	4	24.5	12.0	9.50	1045	20	23.8	19
TIR18035	AT25x11-10	3*	25.1	10.6	9.00	455	7	20.3	19
TIR18050	AT24x9-11	3*	24.5	8.6	7.00	365	7	18.0	19
TIR18055	AT24x10-11	3*	24.4	9.6	8.00	395	7	19.2	19
TIR18060	AT23x8-12	3*	23.1	7.4	6.50	280	7	13.6	19
TIR18065	AT23x10-12	3*	23.1	9.0	8.00	365	7	17.8	19
TIR18070	AT24x8-12	3*	23.8	8.0	6.50	455	7	14.9	19
TIR18073	AT24x11-12	3*	24.4	10.1	9.00	430	7	20.1	19
TIR18075	AT25x8-12	3*	25.2	7.5	6.50	340	7	15.2	19
TIR18081	25x10.00-12	4	25.6	9.0	8.00	670	12	18.3	19
TIR18083	25x11.00-12	4	25.6	9.4	9.00	740	12	19.5	19

The standard by which all other ATV tires are judged. An ideal original equipment replacement tire. Superior shock absorption. Light, strong and steers easy. Famous for performance. Broad range of sizes. Non-highway service. Made in U.S.A.



AT489 XD

CARLISLE AT489 XD

Part No.	Size	Ply	Mtd. Dia. (Inches)	Mtd. Width (Inches)	Rim Width (Inches)	Max Load at 50 MPH (lb)	Max PSI	Tire Weight (lb)	Tread Depth (32nds)
TIR18721	25x8.00-12	8	25.11	7.5	6.5	695	20	20	24
TIR18723	25x11.00-12	8	25.81	10.5	9.0	520	20	27	24
TIR18725	26x8.00-12	8	26.23	8.15	6.5	565	20	21	24
TIR18727	26x9.00-12	8	26.19	9.35	7.0	615	20	21	24
TIR18729	26x11.00-12	8	25.56	10.78	9.0	715	20	28	24
TIR18731	27x9.00-12	8	27.25	9.13	7.0	660	20	23	24
TIR18733	27x11.00-12	8	27.38	10.87	9.0	20	29	24	24

The 489 XD tire is designed for today's UTV. With a bias construction and V-shape lugs, this tire helps maintain a smooth ride in various terrains. The 489 XD is ideal for demanding applications.

Bias Ply ATV Tires



AT489 II

CARLISLE AT489 II

Part No.	Size	Ply	Mtd. Dia. (Inches)	Mtd. Width (Inches)	Rim Width (Inches)	Max Load at 50 MPH (lb)	Max PSI	Tire Weight (lb)	Tread Depth (32nds)
TIR18785	AT26x8-14	3*	26.0	7.8	6.0	355	7	17.0	21
TIR18787	AT26x10-14	3*	26.3	9.8	8.0	430	7	22.4	21



Trail Wolf

CARLISLE Trail Wolf

Part No.	Size	Ply	Mtd. Dia. (Inches)	Mtd. Width (Inches)	Rim Width (Inches)	Max Load (lb)	Max PSI	Tire Weight (lb)	Tread Depth (32nds)
TIR4342	AT19x7-8	2	18.8	6.6	5.38	175	5	8.0	10
TIR4343	AT19x8-8	4	19.2	7.0	6.00	330	10	8.3	10
TIR4344	AT20x7-8	2	19.4	6.8	5.38	157	4	8.5	10
TIR4350	AT25x12-9	4	25.6	12.3	10.00	430	5	25.9	19
TIR4352	AT21x7-10	4	21.4	6.8	5.50	205	5	12.6	15
TIR4356	AT22x10-10	4	23.5	9.2	8.00	245	4	17.1	16
TIR4364	AT25x8-12	4	25.3	7.5	6.50	340	7	16.4	19
TIR4369	AT25x10-12	4	26.5	9.2	7.0	465	7	20.0	19



PXT2

CARLISLE PXT2

Part No.	Size	Ply	Mtd. Dia. (Inches)	Mtd. Width (Inches)	Rim Width (Inches)	Max Load at 50 MPH (lb)	Max PSI	Tire Weight (lb)	Tread Depth (32nds)
TIR4820	26x9-12	6	26	8.4	6.5	930	22	23.1	20
TIR4825	26x11-12	6	26.1	10.3	8	1165	24	26.7	20



Fast Trax

CARLISLE Fast Trax

Part No.	Size	Ply	Mtd. Dia. (Inches)	Mtd. Width (Inches)	Rim Width (Inches)	Max Load at 50 MPH (lb)	Max PSI	Tire Weight (lb)	Tread Depth (32nds)
TIR18500	18x11.00-10	4	17.7	9.7	8.5	1100	22	13.2	16

Fast Trax is a moderately aggressive, low profile drive tire with a wide flat profile. Typically used on professional riding mowers where excellent hillside traction is desired. Non-highway service.

Order by phone (651) 456-5600; Toll free: (800) 328-7400

Bias Ply ATV Tires



Stryker

CARLISLE Stryker

Part No.	Size	Ply	Mtd. Dia. (Inches)	Mtd. Width (Inches)	Rim Width (Inches)	Max Load at 10 MPH (lb)	Max PSI	Tire Weight (lb)	Tread Depth (32nds)
TIR4210	AT22x11-8	2	22.6	11.1	9.00	340	5	21.0	20
TIR4235	AT22x11-9	2	22.6	11.2	10.00	340	5	22.3	20
TIR4237	AT22x11-10	2	22.9	10.1	8.25	330	5	20.8	20

The Stryker features a unique offset chevron pattern that is self-cleaning with great performance in all terrains. Made in the USA.



Black Rock

CARLISLE Black Rock

Part No.	Size	Ply	Mtd. Dia. (Inches)	Mtd. Width (Inches)	Rim Width (Inches)	Max Load at 50 MPH (lb)	Max PSI	Tire Weight (lb)	Tread Depth (32nds)
TIR4010	AT25x8-12	3*	25.0	8.0	6.5	340	7	17.6	22
TIR4015	AT26x9-12	3*	26.0	9.0	7.0	410	7	19.3	24
TIR4020	AT25x10-12	3*	25.25	10.0	8.0	420	7	20.4	22
TIR4025	AT26x11-12	3*	26.25	11.0	9.0	480	7	22.5	24

Designed to balance ride quality with an aggressive 3/4 inch tread depth, the Black Rock is built to handle any trail condition while also providing a smooth ride. Made in the USA.



Workmate

CARLISLE Workmate

Part No.	Size	Ply	Mtd. Dia. (Inches)	Mtd. Width (Inches)	Rim Width (Inches)	Max Load at 50 MPH (lb)	Max PSI	Tire Weight (lb)	Tread Depth (32nds)
TIR4315	23x11-10	8	23.32	10.65	8	785	24	25.18	18



Low Pressure Tire Gauge - Part No. MVT1-20
Plastic indicating bar. Calibrated 1 to 20 P.S.I. in 1/2 pound increments.

Medium Pressure Tire Gauge - Part No. MVTPG
Plastic indicating bar. Calibrated 10 to 50 P.S.I. in 1 pound increments.



Dual Foot Service Tire Gauge - Part No. MVT0-155
Metal indicating bar. Calibrated 10 to 150 P.S.I. in 2 pound increments.

Bias Ply ATV Tires



HD Field Trax

CARLISLE HD Field Trax

Part No.	Size	Ply	Mtd. Dia. (Inches)	Mtd. Width (Inches)	Rim Width (Inches)	Max Load (lb)	Max PSI	Tire Weight (lb)	Tread Depth (32nds)
TIR18090	AT22x12-8	3*	21.3	11.7	9.5	430	7	20.8	20
TIR18095	AT22.5x10-8	3*	22.5	10.2	7.0	365	7	20.5	20
TIR18100	AT25x13-9	3*	24.8	12.4	10.5	535	7	27.1	20
TIR18101	AT18x8.50-10	4	18.2	7.4	7.0	830	22	11.0	14
TIR18102	AT26x12-12	2	25.6	11.8	9.5	1185	10	25.9	20

For the toughest terrain, there's nothing better than the HD Field Trax. An open, non-directional tread pattern makes this tire unbeatable for farm and recreational use on a variety of surfaces.



All Trail / All Trail II

CARLISLE All Trail / All Trail II*

Part No.	Size	Ply	Mtd. Dia. (Inches)	Mtd. Width (Inches)	Rim Width (Inches)	Max Load at 10 MPH (lb)	Max PSI	Tread Depth (32nds)
TIR3715*	20x10.00-8	4	19.8	9.6	7.00	715	22	10
TIR3717*	20x10.00-10	4	20.3	8.2	7.80	695	22	10
TIR3720*	22x9.50-10	4	22.0	9.5	7.75	585	22	14
TIR3722	22x11.00-10	4	21.9	10.2	8.00	880	22	16
TIR3724*	24x9.50-10	4	24.0	9.7	7.50	870	22	14
TIR3726*	24x10.50-10	4	24.5	10.8	8.00	900	20	14
TIR3728	23x8.00-12	4	23.2	8.4	6.50	675	22	19
TIR3730	23x10.50-12	4	23.1	9.9	7.00	835	20	20
TIR3732	25x8.00-12	4	24.7	8.5	7.00	785	22	20
TIR3733*	25x9.00-12	4	25.6	9.0	7.00	825	20	20
TIR3734	25x10.50-12	4	24.7	10.2	8.50	945	20	20
TIR3735*	25x11.00-12	4	25.5	10.1	8.00	1050	22	16
TIR3736	27x9.00-14	4	27.85	8.92	7.00	910	23.6	16
TIR3737	27x11.00-14	4	28.1	10.7	9.00	1170	22	16

*** All Trail II has the same tread pattern as the All Trail with a shallower tread depth.**

Order by phone (651) 456-5600; Toll free: (800) 328-7400

Bias Ply ATV Tires



Knobby

CARLISLE Knobby Tread

Part No.	Size	Ply	Mtd. Dia. (Inches)	Mtd. Width (Inches)	Rim Width (Inches)	Max Load (lb)	Max PSI	Tire Weight (lb)	Tread Depth (32nds)
TIR4175	AT145/70-6	2*	14.3	5.3	4.50	80	4	4.9	6
TIR4176	AT16x8-7	3*	16.5	6.6	5.00	180	7	7.1	13
TIR4140*	18x9.50-8	2	18.3	8.8	7.00	625	10	10.6	13
TIR4180	AT22x11-8	2	22.3	10.5	9.00	495	10	14.4	16
TIR4245	AT25x12-9	2	24.6	11.8	10.00	430	5	18.8	16

***TIR4140 is a dimpled knobby tread.**

The Knobby tire offers a unique design available in solid or dimple tread pattern. The Knobby tire delivers maximum performance on a viarty of terrains and is ideal for ATVs and golf carts.



Turf Tamer Knobby

CARLISLE Turf Tamer Knobby

Part No.	Size	Ply	Mtd. Dia. (Inches)	Mtd. Width (Inches)	Rim Width (Inches)	Max Load (lb)	Max PSI	Tire Weight (lb)	Tread Depth (32nds)
TIR18126	22.5x10-8	4	22.8	9.2	8.0	1390	22	14.2	16
TIR18135	AT25x12-9	3*	25.3	11.2	9.6	495	7	17.5	16

Turf Tamer Knobby features stiff sidewalls and hollow center cleats, making it useful for a variety of applications. Expect terrific handling and a better "bite" than other ATV or utility vehicle tires.



DI-K968

Duro DI-K968

Part No.	Size	Ply	Mtd. Dia. (Inches)	Mtd. Width (Inches)	Rim Width (Inches)	Max Load at 50 MPH (lb)	Max PSI	Tire Weight (lb)	Tread Depth (32nds)
TIR8296	23x11-10	4	23.9	10.2	10.0	1660	24	19.6	17

The Duro DI-K968 is an all terrain, all season tire manufactured for ATVs and UTVs. The tire promotes great all weather and all terrain traction thanks to the tread design. The upper sidewall design, slip-free shoulder pattern with the large tread blocks and the center lug channel firmly grip the soft, loose and uneven terrain surface in all weather. The model was manufactured from a durable tire compound and with a stronger carcass. The compound manages to slow the tread wear rate down significantly

Bias Ply ATV Tires



350 Mag

OTR 350 MAG

Part No.	Size	Ply	Mtd. Dia. (Inches)	Mtd. Width (Inches)	Rim Width (Inches)	Max Load at 10 MPH (lb)	Max PSI	Tire Weight (lb)	Tread Depth (32nds)
TIR3746	25x10.00-12	6	25.1	10.2	8.5	1675	24	27.0	24

The OTR 350 Mag is designed with an open, non-directional tread pattern providing superb traction and wear characteristics on various terrain. The 350 Mag is built to RTV vehicle standards and supports greater load ratings than most marketplace ATV tires today.



Buffalo

Duro Buffalo DI-2010

Part No.	Size	Ply	Mtd. Dia. (Inches)	Mtd. Width (Inches)	Rim Width (Inches)	Max Load (lb)	Max PSI	Tire Weight (lb)	Tread Depth (32nds)
TIR8004	AT23x7-10	6	22.9	7.4	5.5	275	7	14.1	18
TIR8010	AT25x11-10	6	25.2	11.3	9.0	455	7	23.6	22
TIR8014	AT25x12-10	6	25.6	12.0	9.5	495	7	25.4	22
TIR8018	AT23x8-11	6	23.0	7.8	6.5	290	7	16.4	20
TIR8022	AT24x8-11	6	24.6	8.0	6.5	320	7	16.1	20
TIR8026	AT24x9-11	6	24.6	8.9	7.0	365	7	19.7	20
TIR8030	AT24x10-11	6	24.4	10.2	8.0	395	7	23.4	22
TIR8034	AT24x8-12	6	24.4	8.2	6.5	310	7	17.4	19
TIR8038	AT24x11-12	6	24.6	11.0	9.0	420	7	25.5	22
TIR8042	AT25x8-12	6	25.3	7.9	6.5	340	7	17.4	20
TIR8046	AT25x10-12	6	25.2	10.3	8.0	420	7	28.0	30

Aggresive tread pattern pushes through most all types of terrain and a V-shaped style provides directional stability and excellent mud evacuation.



Power Trail

Duro Power Trail DI-2009

Part No.	Size	Ply	Mtd. Dia. (Inches)	Mtd. Width (Inches)	Rim Width (Inches)	Max Load (lb)	Max PSI	Tire Weight (lb)	Tread Depth (32nds)
TIR8202	AT18x9.50-8	2	18.2	9.6	7.0	182	4	11.6	12
TIR8216	AT21x7-10	4	21.4	7.0	5.5	205	5	10.2	15
TIR8218	AT22x7-10	4	22.6	7.0	5.5	220	5	11.2	15

Order by phone (651) 456-5600; Toll free: (800) 328-7400

Bias Ply ATV Tires



Berm Raider

Duro Berm Raider DI-2011

Part No.	Size	Ply	Mtd. Dia. (Inches)	Mtd. Width (Inches)	Rim Width (Inches)	Max Load (lb)	Max PSI	Tire Weight (lb)	Tread Depth (32nds)
TIR8134	AT20x11-9	4	20.0	11.0	9.0	290	5	15.8	15
TIR8140	AT22x11-9	4	22.0	11.0	9.0	395	5	16.0	15
TIR8144	AT22x11-10	4	22.0	11.0	9.0	330	5	17.0	15

The Berm Raider tires are perfect for racers and sport riders alike that are looking for great traction at a great price. These tires perform well in both loose and hard terrain while offering great stability in corners and straight lines.



Dirt Commander

GBC Dirt Commander

Part No.	Size	Ply	Mtd. Dia. (Inches)	Mtd. Width (Inches)	Rim Width (Inches)	Max Load (lb)	Max PSI	Tire Weight (lb)	Tread Depth (32nds)
TIR7800	25x8.00-12	8	25.2	8.2	5 - 7	340	12	20.5	27
TIR7804	25x10.00-12	8	25.2	9.5	6 - 8	420	12	25.9	27
TIR7808	26x9.00-12	8	25.7	8.75	6 - 7	410	12	23.7	27
TIR7812	26x11.00-12	8	25.8	10.0	7 - 9	480	12	27.1	27
TIR7816	27x9.00-12	8	27.7	8.5	6 - 7	750	20	25.0	26
TIR7820	27x11.00-12	8	27.8	10.6	7 - 9	780	20	29.3	26
TIR7832	26x9.00-14	8	26.0	8.5	6 - 7	700	14	23.4	27
TIR7836	26x11.00-14	8	26.0	9.7	7 - 9	730	14	28.2	27
TIR7840	27x9.00-14	8	27.0	8.5	6 - 7	750	14	24.6	27
TIR7844	27x11.00-14	8	27.0	10.0	7 - 9	780	14	29.4	27
TIR7850	29x9.00-14	8	29.0	8.5	5 - 7	925	20	28.2	27
TIR7852	29x11.00-14	8	29.0	10.4	7 - 9	985	20	33.0	27
TIR7854	30x10.00-14	8	30.0	9.8	6 - 8	1050	20	33.7	27
TIR7856	32x10.00-14	8	32.0	9.6	6 - 8	1070	20	36.3	27

A super-tough, puncture-resistant 8-ply rated bias tire, the Dirt Commander offers the perfect lug depth for optimal performance in all types of conditions.

Radial ATV Tires



A.C.T. Radial

CARLISLE A.C.T.

Part No.	Size	Ply	Mtd. Dia. (Inches)	Mtd. Width (Inches)	Rim Width (Inches)	Max Load at 50 MPH (lb)	Max PSI	Tire Weight (lb)	Tread Depth (32nds)
TIR4472	AT25x8R12	3*	25.2	7.9	7.0	340	7	17.0	23
TIR4473	AT26x8R12	3*	25.8	7.7	7.0	375	7	17.3	23
TIR4474	AT25x11R12	3*	25.5	10.5	8.0	455	7	24.8	23
TIR4475	AT26x10R12	3*	26.2	10.4	8.0	440	7	24.6	23



A.C.T. HD Radial

CARLISLE A.C.T. HD

Part No.	Size	Ply	Mtd. Dia. (Inches)	Mtd. Width (Inches)	Rim Width (Inches)	Max Load at 50 MPH (lb)	Max PSI	Tire Weight (lb)	Tread Depth (32nds)
TIR18760	AT25x8R12	6	25.2	7.2	6.5	340	7	21.9	32
TIR18762	AT25x11R12	6	25.4	10.0	9.0	455	7	27.7	32
TIR18764	AT26x9R12	6	26.2	8.6	7.0	410	7	25.7	32
TIR18766	AT26x11R12	6	26.6	10.1	9.0	480	7	30.5	32
TIR18768	AT27x9R12	6	27.5	8.9	7.0	440	7	26.6	32
TIR18770	AT27x11R12	6	27.7	10.4	9.0	495	7	31.8	32

ACT HD has heavy duty sidewall for increased puncture resistance.



Pavemaster

CARLISLE Pavemaster

Part No.	Size	Ply	Mtd. Dia. (Inches)	Mtd. Width (Inches)	Rim Width (Inches)	Max Load	Max PSI	Tire Weight (lb)	Tread Depth (32nds)
TIR4050	25x8.00R12 (205/80R12)	6	25.2	7.8	6	340	28	22.5	20
TIR4055	25x10.00R12	6	25.5	9.7	8	420	28	26.5	20

The Pavemaster is designed for UTV/SxS vehicles, running often on hard-packed surfaces and paved roads. The specially designed tread center zone gives perfect stability on these surfaces.

Order by phone (651) 456-5600; Toll free: (800) 328-7400

Radial ATV Tires



Versa Trail

CARLISLE Versa Trail

Part No.	Size	Ply	Mtd. Dia. (Inches)	Mtd. Width (Inches)	Rim Width (Inches)	Max Load at 50 MPH (lb)	Max PSI	Tire Weight (lb)	Tread Depth (32nds)
TIR18950	26x9R12	6	26.1	8.9	7.0	1170	32	26.3	23
TIR18955	26x11R12	6	26.5	11.1	9.0	1430	34	29.8	23

Versa Trail is an all-purpose utility tire for ATV's and side-by-sides. With its tough tread rubber compound and durable 6-ply rated construction, the tire carcass protects against cuts, chips and tread wear to ensure unequalled puncture resistance.



Power Grip

Duro Power Grip DI-2025

Part No.	Size	Ply	Mtd. Dia. (Inches)	Mtd. Width (Inches)	Rim Width (Inches)	Max Load (lb)	Max PSI	Tire Weight (lb)	Tread Depth (32nds)
TIR8100	AT25x8R12	6	25.0	8.0	6.5	342	7	22.1	28
TIR8102	AT25x10R12	6	25.0	10.0	8.0	419	7	27.8	28
TIR8103	AT25x11R12	6	25.4	11.1	9.0	455	7	28.0	28
TIR8104	AT26x9R12	6	26.0	9.0	7.0	408	7	26.2	28
TIR8106	AT26x11R12	6	26.3	11.0	9.0	480	7	31.5	28
TIR8109	AT26x8R14	6	26.0	8.0	6.5	355	7	22.8	28
TIR8111	AT26x10R14	6	26.1	9.8	8.0	430	7	28.8	28
TIR8114	AT26x12R14	6	26.0	12.0	8.0	520	7	32.1	28
TIR8122	AT29x9R14	6	29	9	7	805	15	25.45	22
TIR8124	AT29x11R14	6	29	11	8	1019	15	32.15	22

The Power Grip is a radial constructed tire designed to help alleviate the hard-impact when riding on rough trails with pits or gravel and boost the driving comfort. Innovative sidewall design aids in protecting the shoulder from being punctured and protection of the rim.

Radial ATV Tires



Buffalo

Duro Buffalo DI-2010

Part No.	Size	Ply	Mtd. Dia. (Inches)	Mtd. Width (Inches)	Rim Width (Inches)	Max Load (lb)	Max PSI	Tire Weight (lb)	Tread Depth (32nds)
TIR8048	AT26x8R12	6	26.0	8.5	6.5	375	7	19.4	21
TIR8052	AT26x11R12	6	26.2	11.3	9.0	480	7	21.7	30



Thrasher HF277

Duro Thrasher HF-277

Part No.	Size	Ply	Mtd. Dia. (Inches)	Mtd. Width (Inches)	Rim Width (Inches)	Max Load (lb)	Max PSI	Tire Weight (lb)	Tread Depth (32nds)
TIR8280	22x8R10	4	22.6	7.4	6.5	200	4	10.9	15



Frontier DI2037

Duro Frontier DI-2037

Part No.	Size	Ply	Mtd. Dia. (Inches)	Mtd. Width (Inches)	Rim Width (Inches)	Max Load (lb)	Max PSI	Tire Weight (lb)	Tread Depth (32nds)
TIR8602	AT25x8R12	6	24.9	8.2	6.5	340	7	20.8	21
TIR8606	AT25x10R12	6	25.2	10.1	8.0	420	7	23.1	21
TIR8610	AT26x9R12	4	25.9	9.1	7.0	714	14	21.5	21
TIR8614	AT26x11R12	4	25.9	10.8	8.0	919	20	26.7	21
TIR8620	AT26x9R14	6	26.0	8.9	7.0	570	12	22.9	21
TIR8624	AT26x11R14	6	25.9	10.8	8.5	1395	14	25.8	21
TIR8626	AT27x9R14	6	27.0	9.0	7.0	600	14	25.9	21
TIR8628	AT27x11R14	6	27.0	11.0	8.0	1020	14	30.8	21

The Frontier tread was designed for peak performance on pavement, hard pack and loose terrain. It is able to handle off road situations while maintaining a safe and comfortable ride on paved surfaces.



Mongrel

GBC Kanati Mongrel

Part No.	Size	Ply	Mtd. Dia. (Inches)	Mtd. Width (Inches)	Rim Width (Inches)	Max Load (lb)	Max PSI	Tire Weight (lb)	Tread Depth (32nds)
TIR4601	AT26x10R12	10	26.0	9.4	6.0 - 8.0	760	20	28.6	21

Order by phone (651) 456-5600; Toll free: (800) 328-7400

Radial ATV Tires



Spartacus

GBC Spartacus

Part No.	Size	Ply	Mtd. Dia. (Inches)	Mtd. Width (Inches)	Rim Width (Inches)	Max Load (lb)	Max PSI	Tire Weight (lb)	Tread Depth (32nds)
TIR7860	AT25x8.00R12	8	25.0	8.3	5 - 7	340	12	22.1	27
TIR7864	AT25x10.00R12	8	25.0	9.4	6 - 8	420	12	25.3	27
TIR7868	AT26x10.00R12	8	26.0	9.6	6 - 8	440	12	27.4	27
TIR7872	AT26x12.00R12	8	26.0	10.8	8 - 10	520	12	31.4	27
TIR7884	AT26x9.00R14	8	26.0	8.1	6 - 7	700	14	25.6	29
TIR7888	AT26x11.00R14	8	26.2	10.7	7 - 9	730	14	30.8	29
TIR7892	AT27x9.00R14	8	27.0	9.0	6 - 7	750	14	27.4	29
TIR7896	AT27x11.00R14	8	27.0	10.4	7 - 9	780	14	33.1	29

Designed to conquer mud and other tough terrains, this 8-ply rated radial puts more rubber on the ground for better gripping power and a smoother, more comfortable ride.



Dura Trail

Carlisle NHS Dura Trail

Part No.	Size	Ply	Mtd. Dia. (Inches)	Mtd. Width (Inches)	Rim Width (Inches)	Max Load (lb)	Max PSI	Tire Weight (lb)	Tread Depth (32nds)
TIR4905	25x8.00R12	8	25.30	8.3	7.0	355	20	26	24
TIR4910	25x10.00R12	8	25.62	10.28	8.0	430	20	31	24
TIR4915	26x9.00R12	8	26.6	9.2	7.0	430	20	27	24
TIR4920	26x11.00R12	8	27.3	10.4	9.0	505	20	34	24
TIR2925	27x9.00R12	8	27.0	9.1	7.0	550	20	26	20

The Carlisle Dura Trail is an all purpose tire ideal for hard pack, desert, rocks, ruts, and intermediate terrains. It's wrap around lugs provide improved shoulder protection and the super deep rim guard feature offers wheel lip protection making it ideal for the modern ride.

ATV Tubes are on Page 53

ATV Tire Chains

PEERLESS



ATV V-Bar Tire Chains

Part No.	Cross Chain Spacing	Size				
CHA1064155	4 - Link	22x9-8 22x9-10 23x8-11	22x10-8 22x10-10 21x10-12	22x10-9 23x7-10 22x8-12	21x-9-10 23x8-10 22x9-12	22x10-8 23x10-10 23x8.5-12
CHA1064355	4 - Link	24x11-8 22x12.50-10 25x11-10 24x11.50-12 26x10-12	24x11-9 24x10.50-10 25x12-10 25x10-12 26x9-14	24x13-9 24x11-10 25x10-11 25x10.50-12	25x11-9 24x11.50-10 23x10.50-12 25x11-12	25x12-9 25x10-10 24x11-12 26x9-12
CHA1064555	4 - Link	22x11-8 24x9-11	22x11-9 24x10-11	22x11-10 24x10-12	23x11-10	24x9.50-10
CHA1064655	4 - Link	24x8-11 6-16	24x8-12	24x9-12	25x8-12	26x8-12
CHA1064756	2 - Link	25x13-9 27x11-12	25x12-11 28x10-12	25x12-12 26x11-14	26x11-12	26x12-12

***Partial listing of tire sizes** ***Sold by the pair.**



ATV Cross Chain Tightener
Part No. CHPQG20048

Hanco is proud to be offering products from companies like Chicago Pneumatic, Ingersoll Rand, and Grey Pneumatic. Providing the highest quality air/power tools and sockets for any job.

Chicago Pneumatic

Chicago Pneumatic is a global manufacturer of high-performance power tools, air compressors, generators, light towers, and hydraulic equipment for professional and industrial applications.



Part #: CPT7748-2

Grey Pneumatic supplies the world's automotive, industrial, assembly, mining, maintenance, construction, and energy industries with heavy duty, high quality, impact and specialty sockets.



Part #: SKT1312D

IR Ingersoll Rand

For more than 100 years, professionals have relied on Ingersoll Rand for quality and performance on the toughest jobs. When it comes to assembly tools, industrial tools, cordless tools and vehicle service tools, don't settle for less.



Part #: 2235TIMAX-2

Order by phone (651) 456-5600; Toll free: (800) 328-7400

Specialty & Forklift Tires



Ground Force Ultra Rib GSE

CARLISLE Ground Force Ultra Rib GSE

Part No.	Size	Ply	Mtd. Dia. (Inches)	Mtd. Width (Inches)	Rim Width (Inches)	Max Load at 10 MPH (lb)	Max PSI	Tire Weight (lb)	Tread Depth (32nds)
TIR9450	6.90-9 TT	10	21.6	6.8	4.0	2200	125	23.3	24

Carlisle Ground Force tires combine extra tread depth and Premium tread compound to set a new standard of durability and wear in the ground support industry. Each tire features a built-in rim guard for maximum wheel protection.



Industrial All Purpose

CARLISLE Industrial All Purpose

Part No.	Size	Ply	Mtd. Dia. (Inches)	Mtd. Width (Inches)	Rim Width (Inches)	Max Load at 10 MPH (lb)	Max PSI	Tire Weight (lb)	Tread Depth (32nds)
TIR1512	7.50-10 TT	10	25.3	7.6	5.5	1975	90	24.4	12

The Industrial All Purpose tire is a general purpose rib design used heavily in the industrial community. A real workhorse.



Industrial Trax

CARLISLE Industrial Trax

Part No.	Size	Ply	Mtd. Dia. (Inches)	Mtd. Width (Inches)	Rim Width (Inches)	Max Load at 10 MPH (lb)	Max PSI	Tire Weight (lb)	Tread Depth (32nds)
TIR9030	20x10.00-10	4	20.0	10.0	8.0	1160	22	13.6	10
TIR9040	23x10.50-12	4	22.5	10.4	8.5	1340	20	27.4	11

The Industrial Trax is designed for hard surface vehicle applications such as golf course concession vehicles, police and security motorized vehicles, etc. Non-highway service.



Industrial Deep Traction

CARLISLE Industrial Deep Traction (With Flap)

Part No.	Size	Ply	Mtd. Dia. (Inches)	Mtd. Width (Inches)	Rim Width (Inches)	Max Load at 10 MPH (lb)	Max PSI	Tire Weight (lb)	Tread Depth (32nds)
TIR9065	29x8-15	12	29.2	7.5	5.5	6870	125	47.5	25

With its flat tread and reinforced beads, the Industrial Deep Traction tire is an essential standard duty tire that delivers stability and long lasting perfomance. Engineers design for high load applications.

Forklift Tires



Premium Wide Trac

CARLISLE Premium Wide Trac (With Flap)

Part No.	Size	Ply	Mtd. Dia. (Inches)	Mtd. Width (Inches)	Rim Width (Inches)	Max Load at 10 MPH (lb)	Max PSI	Tire Weight (lb)	Tread Depth (32nds)
TIR9200	5.70/5.00-8	8	18.5	5.5	4.5/3.0	2450	120	14.7	17
TIR9202	5.70/5.00-8	10	18.5	5.5	4.5/3.0	2790	150	15.5	17
TIR9208	6.90/6.00-9	10	22.2	6.0	5.5/4.0	3665	125	28.6	32
TIR9210	6.50-10	10	23.8	7.1	5.00	4225	115	37.6	32
TIR9214	7.00-12	12	27.3	7.5	5.00	5995	125	51.1	32
TIR9213	2.50-15	18	29.1	9.1	7.50	10100	150	67.8	24
TIR9220	28x9-15	14	27.3	8.9	7.00	7530	140	55.0	18
TIR9226	8.25-15	14	33.6	9.8	6.50	9385	120	84.3	24

Industrial deep traction, heavy ply construction and increased gauge deliver optimum tire life for material handling, mining, compaction and road paving tire requirements. Stabilizing features such as larger tread volume and a wide, flat profile insure premium forklift tire performance.



K380

Kenda K380 (With Flap)

Part No.	Size	Ply	Mtd. Dia. (Inches)	Mtd. Width (Inches)	Rim Width (Inches)	Max Load at 10 MPH (lb)	Tire Weight (lb)	Tread Depth (32nds)
TIR200140	6.00/6.90-9	10	20.8	6.2	4.0	2230	18.92	17
TIR200180	7.00-12	12	26.8	7.8	5.0	3595	33.48	21

An all season tire made for industrial vehicles. The model promotes great year-round performance, thanks to the ideal tread design and all season compound. The tread can maintain surface contact, while the compound keeps the rubber flexible in extreme temperatures.



D301

DEESTONE Industrial D301 (With Flap)

Part No.	Size	Ply	Mtd. Dia.	Mtd. Width (Inches)	Rim Width (Inches)	Max Load (lb)	Max PSI	Tire Weight (lb)	Tread Depth (32nds)
TIR19120	5.00-8	8	18.3	5.4	3.0	1830	115	12.0	16
TIR19140	6.00-9	10	20.9	6.1	4.0	2240	125	20.2	18
TIR19160	6.50-10	10	23.1	6.8	5.0	3805	115	24.0	20
TIR19188	7.50-10	12	25.8	8.2	5.5	5090	120	32.0	23
TIR19180	7.00-12	12	26.7	7.4	5.0	5395	125	35.0	23
TIR19185	7.00-15	12	29.8	7.8	6.0	6185	125	41.0	23
TIR19193	8.15-15 (28x9-15)	14	27.8	8.7	7.0	6775	140	46.0	25
TIR19197	8.25-15	14	33.7	9.4	6.5	8445	120	63.0	23

A tough industrial tire that's designed to stand up to the demands of heavy forklift service.

Order by phone (651) 456-5600; Toll free: (800) 328-7400

Forklift Tires

PEERLESS



Forklift Tire Chains

Part No.	Cross Chain Spacing	Size				
CHA1191055	4 - Link	6.50-10 5.00-14	23x9.00-10	5.70-12	6-12	23x7.50-12
CHA1192055	4 - Link	7.50-10	25x8.50-14	25x7.5-15	23x9.00-15	27x8-16
CHA1193055	4 - Link	7.00-12	27x8.50-15			
CHA1195055	4 - Link	7.00-15	28x8.50-15	28x9-15	29x8-15	
CHA1196055	4 - Link	7.50-15	28x12-15	7.5-16		
CHA1197055	4 - Link	8.15-15	23x12.5-15			
CHA1198055	4 - Link	8.25-15				
CHA1199055	4 - Link	2.50-15	27x10.50-15			
CHAQG0111	4- Link	7.00-12	7.00-15	27x10.5R15	27x8.5R15	28x9.5R15

***Partial listing of tire sizes** ***Sold by the pair.**

Inflation Cages

Part No. ASCA101A

- For tires up to 48" OD X 13" wide.
- Certified for inflating tires up to 130 psi.
- Folds down to a depth of only 7", making it very easy to stow in your service truck.
- Product dimensions - LxWxH: 21-1/2" x 16-3/4" x 51"
- Lightweight portable tire inflation cage of only 69 lb.



Part No. ASCA100WB

- Inflate tires measuring up 48" OD X 21" wide.
- Certified for inflating tires up to 130 psi.
- Folds down to a depth of only 7", making it very easy to stow in your service truck.
- Product dimensions - LxWxH: 29" x 16-3/4" x 52"
- Lightweight portable tire inflation cage of only 78 lb.



Part No. ASCA106

- Safely inflate your TBR tires and multi-piece rims.
- For tires up to 47" OD X 19" wide.
- Certified for inflating tires up to 130 psi.
- Designed for indoor or outdoor tire inflation, it will keep its color and luster.
- Product dimensions - LxWxH: 26-1/4" x 22-1/4" x 57-1/2"
- Net weight (lb): 108lbs



Part No. ASCA102

- For tires up to 47" OD X 19" wide.
- Certified for inflating tires up to 130 psi.
- Designed for indoor or outdoor tire inflation, it will keep its color and luster.
- Product dimensions - LxWxH: 31-3/4" x 26-1/4" x 57-1/2"
- Net weight (lb): 147lbs



Part No. ASCA105

- Safely inflate your TBR tires and multi-piece rims.
- For tires up to 47" OD X 19" wide.
- Certified for inflating tires up to 130 psi.
- Designed for indoor or outdoor tire inflation.
- Product dimensions - LxWxH : 41" x 26-1/4" x 57-1/2"
- Net weight (lb): 182lbs



Part No. ASCA113

- Safely inflate your passenger car, SUV & other smaller tires.
- Equipped with foam cushions to prevent scratches and damages on your wheel.
- Dimensions (L,W,H): 26" x 22" x 40"
- Max Tire Size: 35" OD x 12" Wide



Skid Steer Tires



K395

Kenda K395 Power Grip (With Rim Guard)

Part No.	Size	Ply	Mtd. Dia. (Inches)	Mtd. Width (Inches)	Max Load (lb)	Max PSI	Rim Width (Inches)	Tire Weight (lb)	Tread Depth (32nds)
TIR200281	23x8.50-12 TL	6	22.5	8.5	1810	50	7	22.66	15
TIR200286	27x8.50-15 TL	6	26.5	8.9	1570	45	7	31.46	15
TIR200300	10-16.5 TL	6	30.0	10.7	3500	45	8.25	50.62	23
TIR200400	10-16.5 TL	8	30.2	10.8	4140	60	8.25	52.18	23
TIR200500	12-16.5 TL	8	32.4	11.9	4810	65	9.75	71.17	24
TIR200550	12-16.5 TL	10	32.5	12.0	5600	75	9.75	75.15	24

The Kenda Power Grip is designed with a heavy-duty sidewall to protect against scrubbing, abrasions and punctures. The rim guard protects the rim and bead seat area from debris. For added durability, the Power Grip's three-tiered lug design offers improved wear characteristics, extending the life of the tire. These features combine to provide one of the most durable tires in the industry.



K601

Kenda K601 Rock Grip (With Rim Guard)

Part No.	Size	Ply	Mtd. Dia. (Inches)	Mtd. Width (Inches)	Max Load (lb)	Max PSI	Rim Width (Inches)	Tire Weight (lb)	Tread Depth (32nds)
TIR200325	10-16.5 TL	10	31.0	10.7	4780	75	8.25	60.1	23
TIR200525	12-16.5 TL	10	33.5	12.9	5600	65	9.75	83.7	24

The Kenda Rock Grip is the most recent addition to the Kenda Skid Steer line. Like the Power Grip, this tire features a heavy-duty sidewall to protect against scrubbing and punctures, and a rim guard to protect the rim and bead seal area. The Rock Grip is specially designed to endure the wear and tear and keep you working with less down time.



Trac Chief

CARLISLE Trac Chief

Part No.	Size	Ply	Mtd. Dia. (Inches)	Mtd. Width (Inches)	Rim Width (Inches)	Max Load (lb)	Max PSI	Tire Weight (lb)	Tread Depth (32nds)
TIR9169	26x12.00-12 TL (305/60-12)	8	25.5	12.4	10.5	3020	50	47.0	21
TIR9170	5.70-12 TL	4	22.4	5.7	4.5	1450	60	15.5	17
TIR9175	23x8.50-14 TL (215/55-14)	4	23.0	8.0	7.0	1560	35	23.2	17

Great for general duty skid steer and compact tractor applications, the Trac Chief is engineered with a flat profile for increased stability, rugged tread compounds and a built-in rim guard to protect its bead area from hazard and debris. Made in USA.

Order by phone (651) 456-5600; Toll free: (800) 328-7400

Skid Steer Tires



Ground Force 400 R4

CARLISLE Gound Force 400 R4

Part No.	Size	Ply	Mtd. Dia. (Inches)	Mtd. Width (Inches)	Rim Width (Inches)	Max Load (lb)	Max PSI	Tire Weight (lb)	Tread Depth (32nds)
TIR9166	18x8.50-10 TL	4	18.6	8.10	7.0	825	22	14.40	16
TIR9169	23x8.50-12 TL (215/65-12)	6	22.8	8.20	7.0	1820	50	27.0	14
TIR9410	23x8.50-12 TL (215/65-12)	6	22.8	8.2	7	1820	50	28	14
TIR9412	23x8.50-14 TL (215/65-14)	6	25.8	8.3	7.0	2150	50	30.0	17
TIR9414	27x8.50-15	6	27.0	8.4	7.0	2400	45	34.6	17
TIR9416	27x10.50-15	6	27.4	10.4	8.5	2600	45	36.6	17
TIR9430	10-16.5 NHS	10	31.4	10.4	8.25	4680	75	50.0	21
TIR9435	12.-16.5 NHS	12	32.7	12.0	9.75	6320	80	71	25



Ground Force 400 MX

CARLISLE Ground Force 400 MX

Part No.	Size	Ply	Mtd. Dia. (Inches)	Mtd. Width (Inches)	Rim Width (Inches)	Max Load (lb)	Max PSI	Tire Weight (lb)	Tread Depth (32nds)
TIR9720	12-16.5 NHS	14	33.8	12.2	9.75	6800	90	114.0	47



Ultra Guard MX

CARLISLE Ultra Guard MX

Part No.	Size	Ply	Mtd. Dia. (Inches)	Mtd. Width (Inches)	Rim Width (Inches)	Max Load (lb)	Max PSI	Tire Weight (lb)	Tread Depth (32nds)
TIR9761	14-17.5 NHS TL	14	36.0	14.4	10.50	8540	80	117.0	42



Guard Dog HD

CARLISLE Guard Dog HD

Part No.	Size	Ply	Mtd. Dia. (Inches)	Mtd. Width (Inches)	Rim Width (Inches)	Max Load (lb)	Max PSI	Tire Weight (lb)	Tread Depth (32nds)
TIR9850	10-16.5	12	32.7	12.1	9.8	6320	80	85.0	28
TIR9860	12-16.5	12	32.8	14.4	12.0	6835	60	97.0	28

Where premium skid steer performance is required, choose the Guard Dog HD. Increased puncture and abrasion resistance, coupled with deeper tread depth. Designed for optimum service life.

Skid Steer Tire Chains

PEERLESS



Skid Steer Tire Chains

Part No.	Cross Chain Spacing	Type	Size				
CHA341055	4 - Link	Heavy Twist Link	235/70R15	255/75R15	265/70R15	265/75R15	29x13.50-15
CHA341056	2 - Link		10-15	235/80R16	245/75R16	255/70R16	29x12-16
CHA341095	4 - Link	Square Alloy Link	7.50-16	8.00-16	235/75R16.5	10-16.5	265/60R17
CHA341096	2 - Link		275/55R17	275/60R17	245/70R17.5	38x10-18	
CHA342955	4 - Link	Heavy Twist Link	315/70R15	325/60R15	31x13.50-15	31.5x12.5-15	32x11.5-15
			33x10.5-15	33x12.5-15	12-15	12.5-15	265/85R16
CHA342995	4 - Link	Square Alloy Link	275/75R16	285/70R16	285/75R16	295/75R16	305/70R16
			345/55R16	33x12.50-16	12x16.00	31x13-16.5	31.5x13-16.5
CHA342996	2 - Link	Square Alloy Link	33x12.5-16.5	35x7.50-16.5	10-16.5	12-16.5	
CHA343555	4 - Link	Heavy Twist Link	35x12-15	37x12.5-15	36x13.5-15	35x12.5-16	305/85R16
			32x12.5-16.5	36x12.5-16.5	305/70R16.5	11-17.5	14-17.5
CHAQG0111	4 - Link	Square Rod Link	7.00-12	7.00-15NHS	8.15-15	27x8.50-15	27x10.50-15
			28x9-15	28x9.5-15	29x8-15	29x9-15	30x8-15

***Partial listing of tire sizes** ***Sold by the pair.**

Industrial Tire Size Conversion Chart

Metric Size	Standard Equivalent	Metric Size	Standard Equivalent	Metric Size	Standard Equivalent
215/70D15	27x8.50-15	305/70D16.5	12-16.5	385/65D19.5	15-19.5
260/65D15	27x10.50-15	330/55D16.5	31x13.00-16.5	445/65D19.5	18-19.5
390/60D15	31x15.50-15	395/55D16.5	33x15.50-16.5	385/65D22.5	15-22.5
265/70D16.5	10-16.5	355/70D17.5	14-17.5	445/65D22.5	18-22.5



50lb Bag Calcium Cloride

- Mix with water for tire ballast
- 3-1/2 lb/gallon - slush free to -12° F, solid at -52° F
- 5 lb/gallon - slush free to -53° F, solid at -62° F

Part No. CAL50



Yamada Pump

- 40 GPM Free Flow
- HD Alloy Housing
- Self priming to 18" suction lift
- Non-stalling, has reset button
- Built to last, can run dry
- 1/4 turn reverses flow

Part No. AME15103

Agricultural Tires



R-1

CARLISLE Farm Specialist R-1

Part No.	Size	Ply	Mtd. Dia. (Inches)	Mtd. Width (Inches)	Rim Width (Inches)	Max Load (lb)	Max PSI	Tire Weight (lb)	Tread Depth (32nds)
TIR9710	7-16 TL	6	29.2	8.1	6.0	1100	36	33.8	31
TIR9716	8-16 TL	6	31.4	8.4	6.0	1360	28	40	31

Used primarily on compact utility tractors, the Farm Specialist R-1 tire features an overlapping center tread lug that performs in both wet and dry conditions. This all-purpose tire features a unique multi-angle long bar tread for aggressive performance, excellent traction and lateral stability. Made in the USA.



I-1



HF-1

CARLISLE Farm Specialist I-1/HF-1

Part No.	Size	Tread	Ply	Mtd. Dia. (Inches)	Mtd. Width (Inches)	Rim Width (Inches)	Max Load (lb)	Max PSI	Tire Weight (lb)	Tread Depth (32nds)
TIR2620	4.00-9 TT	I-1	4	17.4	4.8	3.0	550	44	5.0	6
TIR2640	4.00-12 TT	I-1	4	20.4	5.0	3.0	675	44	7.0	6
TIR9505	26x12-12 TL	I-1	10	25.5	11.7	10.5	3110	52	27.0	13
TIR9510	26x12-12 TL	I-1	12	25.5	11.7	10.5	3520	64	33.0	13
TIR9620	25x7.50-15 TL	HF-1	6	25.2	7.5	5.5	1230	45	21.6	10
TIR9625	27x9.50-15 TL	HF-1	6	27.0	9.0	7.0	1610	45	26.9	12

TT = Tube Type TL = Tubeless



Farm Specialist F-2

CARLISLE Farm Specialist F-2 Triple Rib

Part No.	Size	Ply	Mtd. Dia. (Inches)	Mtd. Width (Inches)	Rim Width (Inches)	Max Load at 30 MPH (lb)	Max PSI	Tire Weight (lb)	Tread Depth (32nds)
TIR2650	4.00-15SL	4	24.3	4.4	3.0	585	52	9.2	14
TIR2660	6.00-16SL	6	29.1	6.2	4.0	1140	52	23.8	20



- 5 gallon pail
- Seals punctures of up to 1/4"
- Works in temperatures down to -25 degrees
- Blue in color

Part No. DEL603R-5



- 6 gallon pail
- Recommended for off-road tires
- Works in temperatures down to 0 degrees
- Pink in color

Part No. TRCTXS

Agricultural Tire Chains

PEERLESS



Duo Trac

Duo Trac Series Tractor Tire Chains

Part No.	Size				
CHA1073010	10-28	11.2-28	12.4-24	43x16.00-20	
CHA1077010	44x18-20 13.6-24	13.00-20	14.9-24	13.00-24	13.6-26
CHA1077610	49x16-20 420/70R26	420/70R24 13.6-28	17.5-24	15.5-25	14.9-26
CHA1077810	14-24	14.9-28	380x85R28	420/70R28	
CHA1078710	460/85R38	18.4-42			
CHA1078810	18.4-46	480/80R46			
CHA1079110	460/70R24 420/80R26	16.9-24 425/85R26	17.5-25 420/70R30	16.9-26	17.5-26
CHA1079310	18.4-24	19.5-24	16.9-28		
CHA1079410	18.4-26	18.4-28	16.9-30		
CHA1079610	21L24 18.4-30	480/65R24 16.9-34	20.5-25 15.5-38	550/65R25	555/70R25
CHA1079710	24.5-32	23.1-32	23.1-34	20.8-38	
CHA1079810	480/85R34	18.4-38	480/80R38	14.9-46	
CHA1079910	21L28	18.4-34	480/85R34	16.9-38	

***Partial listing of tire sizes** ***Sold per piece.**

Adjacent cross chains interconnected to prevent cross chain from dropping into the grooves of the tire tread. For maximum traction in extreme mud or snow conditions.



Hi-Way

Hi-Way Series Tractor Tire Chains

Part No.	Size				
CHA1085410	13.6-36	13.6-38	11-42	290/90-42	380/54-34
CHA1084610	13.6-24	12.4-28	11.2-30		
CHA1087110	14.9-24	13.6-28	380/85-24	420/70-24	44X16-20
CHA1087910	16.9-24 425/85R26	16.9-26	17.5-24	420/80R26	420/70R30
CHA1089410	16.9-28	16.9-30			
CHA1089810	18.4-38	14.9-46			
CHAQG0836	9.5-28	11.2-24	15-19.5	365/70-18	
CHAQG0850	12.4-16	13.6-16	14-17.5		

***Partial listing of tire sizes** ***Sold per piece.**

108 Series Hi-Way chains use a heavy duty cross chain for longer wear under extreme conditions.

Order by phone (651) 456-5600; Toll free: (800) 328-7400

Radial Passenger Tubes

Part No.	Size							Valve	Box Qty.	Bulk Box Qty.
TUB130	**ER-12/13**	5.50R12	5.60R12	5.60R13	5.90R13	6.00R12	145R12	TR13	10	40
	145R13	155R12	155R13	P145/80R12	P145/80R13	P155/70R13	P155/80R12			
	P155/80R13	P165/65R13	P165/70R12	P165/70R13	P185/60R13					
TUB134	**FR-13/14**	AR60-13	AR60-14	AR70-13	AR78-13	AR78-14	BR60-13	TR13	10	30
	BR60-14	BR70-13	BR70-14	BR78-13	BR78-14	5.60R14	6.00R13			
	6.00R14	6.15R13	6.40R13	6.50R13	155R14	165R13	165R14			
	175R13	P165/75R13	P165/80R13	P165/80R14	P175/60R14	P175/65R14	P175/70R13			
	P175/70R14	P175/75R13	P175/75R14	P175/80R13	P185/60R14	P185/65R14	P185/70R13			
	P185/70R14	P185/75R13	P195/60R13	P195/60R14	P195/65R13	P205/60R13	P205/60R14			
	7R14									
TUB135	**FR-15**	AR78-15	BR78-15	5.60R15	5.90R15	6.00R15	155R15	TR13	10	30
	165R15	175R15	P155/80R15	P165/80R15	P175/75R15	P185/65R15	P185/70R15			
	P195/60R16	P195/65R15	P205/60R15	P225/50R15						
TUB138	**GR-13/14/15**	CR60-14	CR60-15	CR70-13	CR70-14	CR70-15	CR78-13	TR13	10	28
	CR78-14	CR78-15	DR60-15	DR70-13	DR70-14	DR70-15	DR78-13			
	DR78-14	DR78-15	ER60-14	ER60-15	ER70-14	ER70-15	ER78-14			
	ER78-15	FR70-14	FR70-15	FR78-15	6.70R13	6.85R15	7.00R13			
	7.00R14	7.35R14	175R14	185R13	185R14	185R15	195R13			
	195R14	195R15	P175/80R14	P185/75R14	P185/75R15	P185/80R13	P185/80R14			
	P195/65R14	P195/70R13	P195/70R14	P195/70R15	P195/75R13	P195/75R14	P195/75R15			
	P205/65R14	P205/65R15	P205/70R13	P205/70R14	P205/70R15	P205/75R14	P215/60R14			
	P215/60R15	P215/65R13	P215/65R14	P215/70R14	P225/55R15	P225/60R14	P225/60R15			
	P235/60R13	P245/50R15	7.9R14							
TUB146	**KR-14/15**	FR60-14	FR70-14	FR78-14	GR60-14	GR60-15	GR70-14	TR13	10	25
	GR70-15	GR78-14	GR78-15	HR60-15	HR70-14	HR70-15	HR78-14			
	HR78-15	7.35R15	7.50R14	8.25R14	8.55R15	205R14	205R15			
	215R14	215R15	225R14	P195/80R15	P205/75R15	P215/65R15	P215/70R15			
	P215/75R14	P215/75R15	P225/55R14	P225/65R14	P225/70R14	P225/70R15	P225/75R14			
	P235/60R14	P235/60R15	P245/60R14	P245/60R15	P255/55R15	P255/60R14	P265/50R15			
	P275/50R15									
TUB148	**MR-14/15**	JR60-14	JR70-14	JR70-15	JR78-14	JR78-15	KR70-15	TR13	10	20
	KR78-15	LR60-14	LR60-15	LR70-14	LR78-14	8.00R15	9.00R15			
	9.15R15	225R15	235R15	P225/75R15	P235/70R14	P235/70R15	P235/75R14			
	P235/75R15	P245/70R14	P245/70R15	P255/60R15	P255/65R15	P265/60R14	P265/60R15			
	P275/60R14									
TUB152	**GR-16**	FR78-16LT	5.50R16	6.00R16	6.50R16	7R16	8R16	TR13	10	25
TUB153	**KR-16**	HR78-16LT	6.50R16	6.70R16	7.00R16	7.60R16	LT215/85R16	TR13	10	20
	LT225/70R16	LT225/75R16								
TUB122	**KR-16HD**	HR78-16LT	6.50-16	6.70-16	7.00-16	7.60-16		TR13CW	10	18

Light Truck Tubes

Bias Light Truck Tubes (Tube Type Tires)

Part No.	Size			Valve	Box Qty.	Bulk Box Qty.
TUB160	6.70/7.10-15LT	G78-H78-15LT		TR13	6	22
TUB161	6.70/7.00-15LT	7.10/7.50-15LT	G78/H78/L78-15LT	TR15CW	6	20
TUB162	6.70/7.00-15LT	7.10/7.50-15LT	G78/H78/L78-15LT	TR150	6	22
TUB164	6.00/6.50-16LT	F78-16LT		TR150	6	25

Bias Light Truck Tubes (Tubeless Tires)

Part No.	Size			Valve	Box Qty.	Bulk Box Qty.
TUB240	7-14.5LT	8-14.5LT	9-14.5LT	TR300	2	20
TUB176	9.50-16.5LT	10.00-16.5LT		TR15CW	2	15

Radial Light Truck Tubes

Part No.	Size					Valve	Box Qty.	Bulk Box Qty.
TUB308	9/10/11R15LT 31/32x11.50R15LT LT285/70R15	30x9.50R15LT LT265/70R15 P265/70R15	31x10.50R15LT LT275/70R15 P275/70R15	P285/70R15		TR13CW	2	8
TUB309	12R-15/16LT LT315/70R15 LT305/70R17 LT285/60R17 P275/70R16 P275/65R17	33/35x12.50R15LT LT265/70R16 LT275/65R16 P265/75R16 P305/70R16 P275/60R17	 LT275/70R16 LT275/65R17 P285/75R16 P265/70R17 P285/60R17	LT265/75R16 LT305/70R16 LT325/60R15 P315/70R15 P305/70R17	LT285/75R16 LT265/70R17 LT275/60R17 P265/70R16 P275/65R16	TR13CW	2	14
TUB310	7.00/7.50R15LT LT235/75R15 P225/75R15	LT225/75R15 LT245/70R15 P235/75R15	LT215/75R15 LT255/70R15 P245/70R15	GR78/HR78/LR78R15LT P215/75R15 P255/70R15		TR13CW	2	18
TUB312	7.00/7.50R15LT	G/H/LR78R15LT	215/235/75R15LT			TR150	6	18
TUB315	6.00/6.50/7.00R16LT					TR440	6	16
TUB314	LR78R16LT	7.00/7.50R16LT	LT215/85R16	LT235/85R16		TR150	6	16
TUB316	GR78/HR78-16LT LT235/85R16 LT225/70R16 LT235/65R17 P235/85R16 P235/70R16	7.00/7.50R16LT LT225/75R16 LT235/70R16 LT255/60R17 P225/75R16 P245/70R16	LT215/85R16 LT235/75R16 LT245/70R16 P215/85R16 P235/75R16 P255/70R16	LT225/85R16 LT245/75R16 LT255/70R16 P225/85R16 P245/75R16 P235/65R17	 P225/70R16 P255/60R17	TR15CW	6	18
TUB317	GR78/HR78R16LT LT235/85R16 LT225/70R16 LT235/65R17 P235/85R16 P235/70R16	7.00/7.50R16LT LT225/75R16 LT235/70R16 LT255/60R17 P225/75R16 P245/70R16	LT215/85R16 LT235/75R16 LT245/70R16 P215/85R16 P235/75R16 P255/70R16	LT225/85R16 LT245/75R16 LT255/70R16 P225/85R16 P245/75R16 P235/65R17	 P225/70R16 P255/60R17	TR13CW	6	18
TUB313	7.00R16	7.50R16	8.25R16			TR440	6	16
TUB319	9.00R16					TR441	2	12
TUB311	14R16.5 36.5R15	35R15 36.5R16	35R16 36.5R16.5	35R16.5		TR13	9	9

Order by phone (651) 456-5600; Toll free: (800) 328-7400

Medium & Heavy Duty Truck Tubes

Radial Low Platform Trailer Tubes

Part No.	Size	Valve	Box Qty.	Bulk Box Qty.
TUB318	7.00/7.50R15	TR440	2	18
TUB320	8.25R15	TR444	2	12
TUB324	9.00/10.00/11.00R15	TR444	2	10

Bias Heavy Duty Truck and Bus Tubes

Part No.	Size	Valve	Box Qty.	Bulk Box Qty.
TUB208	6.50/7.00-20	TR440	2	12

Radial Tubeless Wheel Tubes (Drop-Center)

Part No.	Size			Valve	Box Qty.	Bulk Box Qty.
TUB302	8.00/8.75R16.5LT			TR15CW	2	20
TUB304	9.50/10R16.5LT	31x10.50R16.5LT		TR15CW	2	18
TUB305	9.50/10R16.5LT			TR218A	2	18
TUB306	12R16.5LT	33x12.50R16.5LT		TR15CW	2	14
TUB307	12R16.5LT	33x12.50R16.5LT		TR218A	2	12
TUB243	7/8R17.5LT	245/70R17.5LT	215/235/75R17.5LT	TR15CW	2	15
TUB242	8/9R19.5			TR15CW	2	6
TUB244	8/9R19.5			TR300	2	12
TUB245	15/18R19.5	385/65R19.5		TR218A	2	5
TUB246	15/18R19.5	385/65R19.5		TR15CW	2	5
TUB248	8/9R22.5	225/70R22.5		TR300	1	10
TUB346	10/11/12R22.5	295/75R22.5	275/80R22.5	TR300	2	6
TUB347	15/16.5/18R22.5	385/65R22.5	445/65R22.5	TR15CW	1	5
TUB348	11/12R24.5	285/75R24.5	275/80R24.5	TR300	2	5

Radial Heavy Duty Truck and Bus Tubes

Part No.	Size		Valve	Box Qty.	Bulk Box Qty.
TUB325	7.00/7.50R17/18		TR440	2	14
TUB326	7.50R20		TR441	2	12
TUB328	8.25R20		TR442	6	10
TUB330	9.00R20		TR443	6	9
TUB332	10.00R20 (12/80R20)		TR444	7	7
TUB334	11.00R20 (13/80R20)		TR444	6	6
TUB336	12.00R20 (14/80R20)		TR444	2	4
TUB338	13.00R/14.00R20/21	46x17R20	TR445	2	3
TUB339	16.00R20		TR445	1	3
TUB340	10.00R22		TR444	6	6
TUB344	11.00/12.00R24/25		TR444	2	4
TUB345	13.00/14.00R24/25	15.5/17.5R25	TR445	2	4
TUB355	16.00R24 16.00R25		TR445	1	3

Grader & Off-The Road Tubes

Bias Loader/Grader Tubes

Part No.	Size	Valve	Box Qty.	Bulk Box Qty.
TUB506	14.00-20	TR220A	1	4
TUB509	13.00/14.00-24/25 15.5/17.5-25	TR220A (3/4" Offset)	1	4
TUB611	15.5/16/17.5-24/25	TR220A	1	4
TUB613	17.5-25	TR220A	1	1
TUB614	29.5-29	TRJ1175C	1	1


Radial Loader/Grader Tubes

Part No.	Size	Valve	Box Qty.	Bulk Box Qty.
TUB490	14R17.5	TR15CW (3/4" Offset)	2	9
TUB491	14R17.5 355/70R17.5	TR218A	2	9
TUB507	16.00R20/21	SP1000 Spud Only	1	3
TUB502	13.00/14.00R24	TR220A	2	4
TUB508	13.00/14.00R24/25	SP1000 Spud Only	1	4
TUB610	15.5/16.00/17.5R24/25	SP1000 Spud Only	1	4
TUB514	15.5R25	TRJ1175C	1	4
TUB615	16.00R24/25	TR220A	1	1
TUB510	17.5R25	TRJ1175C	1	3
TUB612	18.00/20.5R24/25	SP1000 Spud Only	1	2
TUB517	20.5R25	TRJ1175C	1	2
TUB515	20.5R25	SP1000 Spud Only	1	2
TUB518	23.5R25	TRJ1175C	1	2
TUB519	26.5R25	TRJ1175C	1	1

Radial Natural Rubber Off-The-Road Tubes

Part No.	Size	Valve	Box Qty.	Bulk Box Qty.
TUB620NR	21.00R24/25 23.5R24/23.5R25	SP1000 Spud Only	1	1
TUB655NR	67x34.00R25/26	TR218A (8" offset)	1	1
TUB665NR	600/55R26.5 700/50R26.5	TR218A	1	1
TUB670NR	35.5LR32	TR218A (8" offset)	1	1

Large Bore Screw-On Inner Tubes Valves

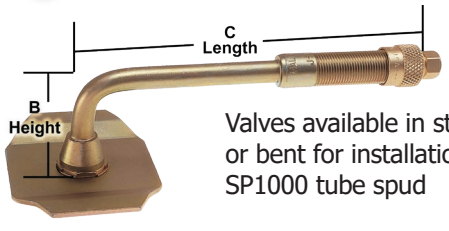


Valves available in straight or bent for installation on SP1000 tube spud

Part No.	Bend Angle	B Height	C Length
HALLB-216	-	1-29/32"	-
HALLB-217	-	4-5/32"	-
HALLB-219	90°	1-1/2"	2-7/8"
HALLB-225	88°	1-3/8"	4-1/8"
HALLB-226	-	5-25/32"	-

Agricultural Valve Service Kit

Put one in each service truck, never go back to the shop because you don't have the right valve. Replacement price list included in kit to aid in pricing out valves both in the field or in the shop.

Our Kits Contain Valves To Cover 97% Of The Wheels You May Encounter!

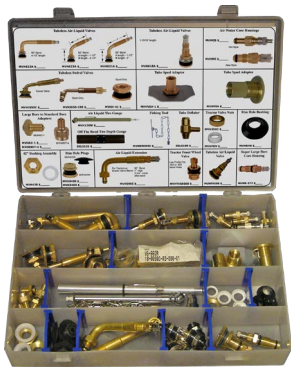

Part No. MVHCR6

Order by phone (651) 456-5600; Toll free: (800) 328-7400

Front Farm Tubes

Bias Farm Front/Implement Tubes

Part No.	Size	Valve	Box Qty.	Bulk Box Qty.
TUB400	9.00-10	TR150	6	18
TUB402	5.90/6.40/6.50/6.70-15/16	TR15	6	30
TUB403	7.60-15	TR15CW	6	18
TUB404	7.5L/9.5L-14/15	TR15	6	18
TUB406	7.5/8.5/9.5L-14/15 9.00/9.50-14	TR13	6	18
TUB408	11L-14	TR13	6	12
TUB409	11L-15 **(8" Rim)**	TR15	6	12
TUB410	11L-15/16 31/33x12.50-15 31x13.50-15	TR15	6	14
TUB411	11L-15/16 31/33x12.50-15 31x13.50-15	TR218A	2	14
TUB416	12.5L-15/16 31x15.50-15	TR15CW	6	12
TUB418	12.5L-15/16 31x15.50-15	TR218A	1	12
TUB419	11.2/12.4-16	TR218A	1	12
TUB420	14.5/75-16.1 14L-16.1 12.4/13.6-16 36x13.50-15	TR15CW	1	9
TUB422	14.5/75-16.1 14L-16.1 12.4/13.6-16 36x13.50-15	TR218A	1	9
TUB424	13.50/16.5L-16.1	TR218A	1	4
TUB432	10.00-15/16	TR15CW	1	10
TUB436	11.00-16	TR15CW	1	8
TUB438	10.00/11.00-15/16	TR218A	1	8
TUB440	4.00/5.00-15	TR15	6	30
TUB421	14.50-15 12.5L-15/16 31x15.50-16	TR218A	12	12
TUB442	5.50/5.90/6.00-16	TR15	6	25
TUB443	5.50/6.50-16	TR218A	6	25
TUB444	6.50/7.00/7.50/7.60-16	TR15	6	16
TUB445	7.00/7.50-16	TR218A	6	16
TUB446	8.00/9.00-16	TR15	6	12
TUB448	6.50/7.00/7.50-18 SL	TR15	6	14
TUB450	4.00-18/19 SL	TR15	6	25
TUB451	9.5/12.5L-18/20	TR15	1	10
TUB452	10.5L/12.5L-18/20	TR15CW	2	10
TUB455	7.50/8.25-20 SL	TR15	1	14
TUB458	9.00/9.50/10.00-20 SL	TR15CW	1	10
TUB470	44x14.50-20	TR218A	1	4

Radial Farm Front/Implement Tubes

Part No.	Size	Valve	Box Qty.	Bulk Box Qty.
TUB405	9.5LR15	TR218A	16	16
TUB437	10/11R15/16	TR15	6	14
TUB439	10/11R15	TR218A	1	5
TUB412	11L/12.5LR15/16	TR15	12	12
TUB431	18.4/19.5/21.5R16.1	TR218A	1	3
TUB414	15/55R17, 380/55R17	TR218A	1	6
TUB417	12.5LR-15/16	TR15CW	8	8
TUB449	480/45R17, 19.0/45R17	TR15CW	1	6
TUB454	9.5/12.5LR18/20	TR218A	1	10
TUB462	12.00R20	TR218A	1	5
TUB465NR	42/48x25.00R20, 38x18.00R20, 48x25.00R20	TR218A (Center)	1	1
TUB466NR	42/48x25.00R20, 38x18.00R20	TR218A (3-3/4" Offset)	1	1
TUB495	500/45R22.5, 550/45R22.5	TR218A	1	3

Rear Farm Tubes

Bias Rear Farm Tubes

Part No.	Size	Valve	Box Qty.	Bulk Box Qty.
TUB447	8.3/9.5-16	TR218A	1	15
TUB520	8.3/9.5-22	TR218A	1	12
TUB522	7.50/8.3/9.5-24	TR218A	1	10
TUB524	9.00/10.00/11.2/12.4-24	TR218A	1	7
TUB532	18.4/19.5L/21L-24/26	TR218A	1	4
TUB526	13.6/12.4-24/26	TR218A	1	6

Radial Rear Farm Tubes

Part No.	Size	Metric	Valve	Box Qty.	Bulk Box Qty.
TUB521	13.6R20		TR218A	1	4
TUB525	11.2/12.4R24	320/360/370R24	TR218A	1	7
TUB527	13.6/14.9R24/26	340/380/85R24, 380/420/70R24/26	TR218A	1	5
TUB533HD	14.9/16.9/17.5LR24/26	420/480/70R24, 420/480/70R26	TR218A	1	5
TUB531	18.4/19.5/21LR24/26	520/70R26	TR218A	1	4
TUB537	23.1LR26	620/75R26	TR218A	1	2
TUB545	9.5/9.00R28, 7.2R30		TR218A	1	6
TUB528	11.2R/12.4R28	320/360/70R28	TR218A	1	7
TUB543	13.6/14.9R28/30	380/420/70R28	TR218A	1	5
TUB543HD	13.6/14.9R28/30	380/420/70R28	TR218A	1	5
TUB535HD	16.9/18.4R28	480/520/70R28, 540/65R28	TR218A	1	3
TUB546HD	16.9/18.4R30	380/85R30, 480/70R30, 420/90R30	TR218A	1	3
TUB549	23.1R30	620/75R30	TR218A	1	2
TUB551	9.5R32		TR218A	1	8
TUB553	24.5R32, 23.1R34	650/75R32, 620/75R34	TR218A	1	1
TUB557	13.6/14.9R34	380/385/85R34	TR218A	1	4
TUB560HD	16.9/18.4R34	480/520/70R34	TR218A	1	2
TUB561	20.8R34	520/70R34	TR218A	1	2
TUB569	11.2/12.4R34/36	290/95R34, 320/85R34	TR218A	1	6
TUB568	9.5R36		TR218A	1	6
TUB571	11.2/12.4R36/38		TR218A	1	6
TUB573HD	13.6/14.9/15.5R36/38	320/85R38	TR218A	1	4
TUB578HD	16.9/18.4R38	480/80R38	TR218A	1	3
TUB579		710/70R38	TR218A	1	1
TUB580HD	20.8R38	520/70/85R38, 580/70R38, 600/65R38	TR218A	1	2
TUB585	9.5/11.2/12.4R42		TR218A	1	5
TUB586HD	18.4/20.8R42	620/70R42, 650/65R42, 520/85/70R42, 480/80R42	TR218A	1	2
TUB589	710/70R42		TR218A	1	1
TUB588	12.4/13.6/14.9R46	380/90R46	TR218A	1	4
TUB588A	14.9R46		TR218A	1	1
TUB590	16.9/18.4R46	480/80R46	TR218A	1	1
TUB635	20.8R46	520/85R46	TR218A	1	1
TUB638	9.5/11.2R48		TR218A	1	1
TUB640HD	16.9/18.4R50	380/420/90R50	TR218A	1	1
TUB645HD		270/95R52/54	TR218A	1	1

Order by phone (651) 456-5600; Toll free: (800) 328-7400

Rear Farm Tubes

Radial Severe Service Rear Farm Tubes

Part No.	Size	Metric	Valve	Box Qty.	Bulk Box Qty.
TUB600	23.1R26	620/75R26	TR218A	1	2
TUB602	28LR26	750/65R26	TR218A	1	1
TUB592	18.4R30	420/70R30	TR218A	1	2
TUB592XHD	18.4R30 **(Extra Weight)**	420/70R30	TR218A	2	2
TUB593	30.5LR32	800/65R32	TR218A	1	1
TUB593XHD	30.5LR32 **(Extra Weight)**	800/65R32	TR218A	1	1
TUB601	24.5R32 23.1R34	650/75R32 620/75R34	TR218A	1	1
TUB594HD	18.4R34	520/70R34	TR218A	1	2
TUB594XHD	16.9/18.4R34 **(Extra Weight)**	520/70R34	TR218A	2	2
TUB595	20.8R34	580/70R34	TR218A	1	2
TUB596HD	15.5R38	420/70R38	TR218A	1	4
TUB575	15.5R38 **(Firestone)**	320/85R38	TR218A	1	1
TUB597HD	18.4R38	520/75R38	TR218A	1	2
TUB597XHD	18.4R38 **(Extra Weight)**	520/75R38	TR218A	2	2
TUB598HD	20.8R38	520/85R38 580/70R38 600/65R38	TR218A	1	2
TUB599HD	18.4/20.8R42	580/70R42 620/70R42 650/65R42	TR218A	1	2
TUB599XHD	18.4/20.8R42 **(Extra Weight)**	580/70R42 620/70R42 650/65R42	TR218A	2	2
TUB605	16.9/18.4R46	480/80R46	TR218A	1	1

Natural Rubber Radial Rear Farm Tubes

Part No.	Size	Metric	Valve	Box Qty.	Bulk Box Qty.
TUB531NR	16.9/18.4R26 NR	480/520/70R26	TR218A	1	1
TUB538NR	23.1R26 NR	620/75R26	TR218A	1	1
TUB540NR	28LR26 NR	750/65R26	TR218A	1	1
TUB546NR	16.9/18.4R30 NR	480/70R30, 420/90R30	TR218A	1	1
TUB552NR	30.5LR32 NR	800/65R32	TR218A	1	1
TUB554NR	24.5R32, 28L/60R32 NR		TR218A	1	1
TUB559NR	16.9/18.4R34 NR	480/520/70R34	TR218A	1	1
TUB561NR	20.8R34 NR	700/70R34, 600/65R34	TR218A	1	1
TUB578NR	16.9/18.4R38 NR	480/80R38	TR218A	1	1
TUB579NR		650/85R38, 710/70R38 NR	TR218A	1	1
TUB584NR	20.8R38 NR	520/85R38, 580/70R38, 600/65R38	TR218A	1	1
TUB587NR	18.4R42 NR	480/80R46	TR218A	1	1
TUB586NR	20.8R42 NR	620/70R42, 650/65R42, 520/70/85R42	TR218A	1	1
TUB589NR		710/70R42	TR218A	1	1
TUB590NR	16.9/18.4R46	480/80R46	TR218A	1	1
TUB591NR		270/300/95R50/52/54, 320/90R50/52/54	TR218A	1	1

Trailer, Lawn & Garden, Golf Cart & Racing Tubes

High Speed Trailer/Lawn & Garden/Golf Cart Tubes

Part No.	Size	Valve	Box Qty.	Bulk Box Qty.
TUB700	2.00x50 (8x2)	TR87	10	10
TUB702	2.80/2.50-4	TR87	10	10
TUB702P	2.80/2.50-4	TR87P **(Parallel Valve)**	10	10
TUB703	9x3.50-4	TR87	10	10
TUB703P	9x3.50-4	TR87P **(Parallel Valve)**	10	10
TUB704	4.10/3.50-4	TR87	10	50
TUB704P	4.10/3.50-4	TR87P **(Parallel Valve)**	10	10
TUB705	4.10/3.50-4	TR13	10	50
TUB706	3.40/3.00-5 (11x350/400-5)	TR87	10	50
TUB708	4.10/3.50-5	TR87	10	50
TUB709	4.10/3.50-5	TR13	10	50
TUB710	11x4.50/6.00-5	TR87	10	10
TUB711	13x5.00-6	TR13	10	50
TUB712	4.10/3.50-6 (13x400/500-6), (145/70-6)	TR87	10	50
TUB713	4.10/3.50-6 (13x400/500-6), (145/70-6)	TR13	10	50
TUB714	5.30/4.50-6 (15x550/600-6)	TR87	10	10
TUB715	15x6.00-6	TR13	10	50
TUB717	5.30/4.50-6 (15x550/600-6)	TR13	10	50
TUB716	8.00-6	TR87	10	20
TUB720	3.00/3.50-8	TR87	10	10
TUB721	3.00/3.50-8	TR13	10	10
TUB722	4.80/4.00-8	TR13	10	45
TUB723	4.80/4.00-8	TR87	10	40
TUB724	5.70/5.00-8	TR13	10	40
TUB726	16x6.50/7.50-8 18x6.50/7-8 16.5x6.5-8	TR13	10	30
TUB728	18x8.50/9.50-8 18.5x8.5/9.5-8 21x12.00-8	TR13	10	20
TUB729	20x8/10-8	TR13	10	20
TUB730	4.00/4.80-9	TR13CW	6	40
TUB732	6.90/6.00-9 21x8/9-9 21x8-10 6.50/7.00-10	TR13	10	25
TUB736	20x8.00/10.00-10	TR13	10	25
TUB737	20.5x8.0-10	TR15	25	25
TUB740	4.00/4.80-12	TR13	10	40
TUB742	4.50/5.30-12	TR13	10	40
TUB744	6-12	TR13	10	30
TUB746	23x8.50/9.50/10.50-12 23.5x8.5-12	TR13	10	20
TUB747	24x12.00-12	TR13	10	15
TUB748	26x12.00-12 26x10.50-12	TR13CW	10	15

Natural Rubber Drag Racing Tubes

Part No.	Size		Valve	Box Qty.	Bulk Box Qty.
TUB980NR	9.00/28.5-15 (D4519)	9.00/29.5-15 (D4519)	TR218A	1	1
TUB982NR	12.0/30.5-15 (D6028) 12.2/31.25-15W (D6028) 14.0/32.0-15W (D6028)	12.2/31.25-15 (D6028) 14.0/32.0-15 (D6028) 15.0/33.5-15 (D6028)	TR218A	1	1

ATV & Motorcycle Tubes

Bias ATV Tubes

Part No.	Size				Valve	Box Qty.	Bulk Box Qty.
TUB806	16x8.00-7				TR6	6	25
TUB783	18x8.50/9.50-8	18.5x8.5/9.5-8	21x12.00-8	22x11.00-8	TR4	6	20
TUB814	25x12-9	25x13-9			TR4 (3/4" Offset)	6	22
TUB780	AT18x10/11-8 AT20x11-9	AT19x9-8 AT18x10/11-10	AT20x10/11-8 AT20x10/11-10	AT18x11-9	TR4	6	20
TUB781	AT19x8-8 AT22x7-9/10	AT20x7-8/9 AT20x8-10	AT21x8-9 AT21x7-10		TR4	6	20
TUB785	AT21x11/12-8 AT22x10-8/9	AT22x11-8 AT22x11-9	AT23x10-8 AT22x8/9/10/11-10		TR4	6	20
TUB815	24x11-10				TR6	6	20
TUB817	AT25x8/9/10-12	AT23x8-11	AT24x8/9-11		TR4	6	20

Radial ATV Tubes

Part No.	Size				Valve	Box Qty.	Bulk Box Qty.
TUB280	18x8/8.5/9.5R8	18x10/11R8	19x8/8.5/9.5R8	19x10/11R8	TR6	10	10
TUB283	21/22x11/12R8 19x8.5/9.5R8 21/22x10R8 22x7R9	18x8R8, 19x10/11R8 22x9R8 23x8R9	18x8.5/9.5R8 20x7R8 21x8R9 22x11R9	18x10/11R8 20x10/11R8 20x7R9	TR6	10	10
TUB281	20x8/9/10/11R8 22x8/9/10/11R8	20x8/9/10/11R9 22x8/9/10/11R9	21x8/9/10/11R8	21x8/9/10/11R9	TR6	10	10
TUB286	25x12/13R9 25x13.5R9 25x12R10	24x12/13R9 25x11R9 26x12R10	24x11R9 24x11R10	24x13.5-9 25x11R10	TR6	10	10
TUB287	20x8/10R10				TR6	10	10
TUB288	22/23x8R11/12 24x8R12 24x10R12	24x8R11 25x8R12 25x10R12	24x9R11 23x9R12	23.5x8R11 23x10R12	TR6	10	10
TUB290	24/26x12R12 27x8R11/12 27x11/12R12	25x12/13R12 26x10/12R12	25x8R11/12 25x11R12	26x8R11/12 26x11R11/12	TR6	10	10
TUB294	26x8R14	26x9R14			TR6	10	30
TUB295	26x11R14				TR4	14	14
TUB296	27x9R14				TR4	25	25
TUB297	27x11R14				TR4	14	14
TUB260	28x10R15				TR4	20	20
TUB264	30x10R15				TR6	14	14
TUB266	31x10R15				TR6	14	14
TUB268	32x10R15				TR6	14	14
TUB270	33x10R15				TR6	14	14
TUB272	33x11.50R15				TR6	14	14

Industrial Tubes

Bias Industrial Tubes

Part No.	Size		Valve	Box Qty.	Bulk Box Qty.
TUB905	5.70/5.00-8		JS2	6	40
TUB908	18x7.00-8		TR87	6	30
TUB914	21x8-9	690/600-9	JS2	6	20
TUB917	6.90/6.00-9	6.50/7.50-10	TR135	6	30
TUB918	6.90/6.00-9		JS2	6	30
TUB920	3.50/4.00-10		TR87	10	50
TUB924	6.50-10		TR440	6	25
TUB927	6.50-10		TR218A	25	25
TUB929	6.50-10 **(Double Weight)**		TR440	1	10
TUB925	6.50/7.00/7.50-10		TR135	6	25
TUB926	6.50/7.50-10		TR13	6	25
TUB928	6.50/7.00/7.50-10		JS2	6	25
TUB400	9.00-10		TR150	6	18
TUB932	4.80/5.30/6-12	21x7-12 **(Extra Weight)**	JS2	30	30
TUB933	23x10.50-12		TR75A	20	20
TUB935	7.00-12		TR440	6	20
TUB941	30x11.50-14.5		TR75A	10	10
TUB945	2.50/3.00-15		TR442	6	6
TUB938	5.50-15		JS2	2	20
TUB939	6.00-15 **(Double Weight)**		TR75A	1	13
TUB948	7.00-15,	27x8.50/9.50/10.50-15	TR218A	6	6
TUB940	7.00/7.50/8.25-15,	30x8-15	TR440	6	16
TUB943	6.00-15		TR227	10	10
TUB944	6.00-15		TR227	30	30
TUB946	7.50-15 **(Double Weight)**		TR75A	1	10
TUB947	10.00-15	11.00-15 **(Double Weight)**	TR75A	1	5
TUB954	14.50-15		TR75A	10	10
TUB949	215/70D15	27x8.50/9.50/10.50-15	TR15CW	6	10
TUB952	28x9-15 8.15-15	29/30x8-15 7.00-15	TR440	6	16
TUB953	25x7.50/9.50-15		TR440	10	10
TUB955	28x12-15		TR440	1	16
TUB956	31x15.50-15		TR218A	1	12
TUB958	32x12-15		TR440	1	8
TUB960	36x11-16	37x11.50-16	TR77A	12	12
TUB961	44x16		TR78A	4	4
TUB963	9.50/10.00-16.5	265/70-16.5	TR15CW	2	12
TUB965	12-16.5	305/70-16.5	TR15CW	2	12
TUB978	355/80-20		TR218A	5	5

Radial Industrial Tubes

Part No.	Size	Valve	Box Qty.	Bulk Box Qty.
TUB970	6.00/6.90R9	JS2	6	30
TUB971	6.50R10	JS2	6	25
TUB968	23x9R10	JS2	16	16
TUB967	27x10R12	TR75A	15	15
TUB972	7.00R12	TR75A	6	20
TUB975	6.00R14	TR75A	30	30
TUB973	2.50/3.00R15	TR442	6	10
TUB974	8.25R15	TR75A	6	12
TUB975	6.00R14	TR75A	30	30
TUB976	10/11.00R15	TR75A	2	10
TUB977	14R17.5, 355/70R17.5, 33x15.50R16.5	TR218A	1	9
TUB678	12.00R20 **(Severe Service)**	TR75A	4	4
TUB680	12.00R20 **(Severe Service)**	TR78A	4	4
TUB979	20.00R20, 50x20.00R20	TR78A	3	3

Order by phone (651) 456-5600; Toll free: (800) 328-7400

Motorcycle Tubes

Motorcycle / Scooter Tubes

Part No.	Size	Valve	Box Qty.
TUB875	12.5x2.25	TR13	1
TUB876	12.5x2.25	TR87 / 45°	1
TUB721	3.00/3.50-8	TR13	10
TUB824	2.50/2.75-10	TR4	1
TUB825	3.00/3.25-10	TR4	1
TUB826	3.50/4.00-10	TR6	1
TUB857	2.75/3.00-12	TR4	1
TUB849	2.00/2.25-14	TR4	1
TUB851	2.75/3.00-14	TR4	1
TUB850	3.25/3.50-14	TR4	1
TUB852	2.00/2.25-16	TR6	1
TUB854	2.50/2.75-16	TR4	1
TUB855	2.75/3.00-16	TR4	1

Part No.	Size	Valve	Box Qty.
TUB843	4.25/4.60-16	TR6	1
TUB856	2.25/2.50-17	TR6	1
TUB830	2.75/3.00-17	TR4	1
TUB829	3.25/3.50-17	TR4	1
TUB848	4.50/4.75-17	TR6	1
TUB832	2.75/3.00-18	TR4	1
TUB834	3.50/4.00-18	TR6	1
TUB835	4.25/4.50-18	TR6	1
TUB836	2.75/3.00-19	TR4	1
TUB837	3.25/3.50-19	TR4	1
TUB838	3.75/4.00-19	TR6	1
TUB840	2.75/3.00-21	TR4	1
TUB841	3.25/3.50-21	TR6	1

Motorcycle Street Tire Size Conversion Chart


Front Tires		
Metric	**Alpha**	**Inch**
80/90	MH90	2.50/2.75
90/90	MJ90	2.75/3.00
100/90	MM90	3.25/3.50
110/90	MN90	3.75/4.00
120/80	NA	4.25/4.50
120/90	MR90	4.25/4.50
130/90	MT90	5.00/5.10

Rear Tires		
Metric	**Alpha**	**Inch**
110/90	MP85	4.50/4.75
120/90	MR90	4.50/4.75
130/80	NA	5.00/5.10
130/90	MT90	5.00/5.10
140/80	NA	5.50/6.00
140/90	MU90	5.50/6.00
150/80	MV85	6.00/6.25
150/90	MV85	6.00/6.25

Tube Notes ...

Valve Offset Is Measured From The Center Of The Wheel

Example of a 10” Rim

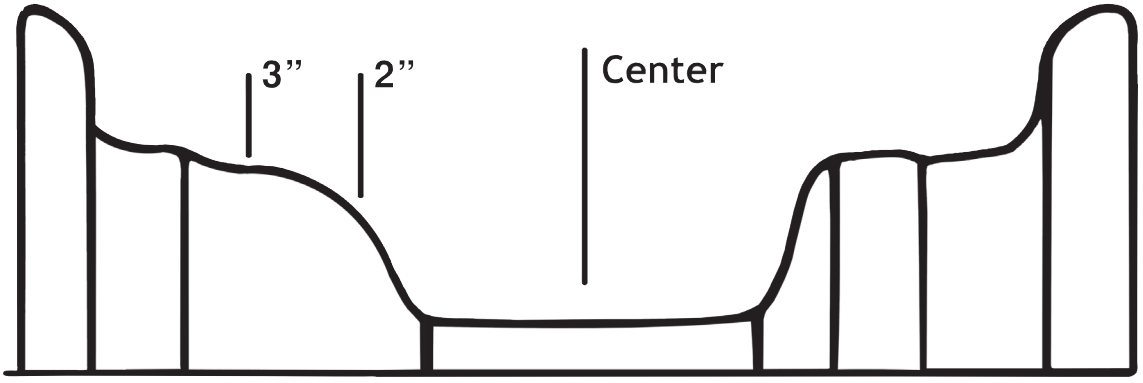

Do Not Use Petroleum Based Products With Tubes

Valve Reference Chart



TR13 - Small diameter stem for .453" valve hole.

TR13CW - Made to use with calcium chloride.



MVHRHB - Bushing used to allow TR13 to fit in .625" rim hole without damage.



TR15 - Large diameter stem for .625" valve hole.

TR15CW - Made to use with calcium chloride.



TR135 - (2-1/4" long) Can be bent by hand to meet valve angle needed. Valve holds position of initial bend. For .625" valve holes.




TR150 - (3-1/2" long) Can be bent by hand to meet valve angle needed. Valve holds position of initial bend. For .625" valve holes.



TR218A - Air water stem 1-27/32" long.

TR220A - Air water stem 2-15/16" long.

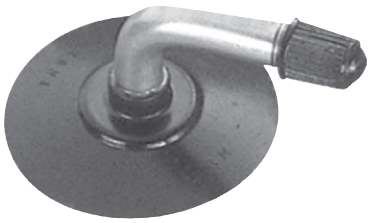

TR87A - Short metal stem with 90° bend.




TR4/TR6 - For ATV applications.



TR300 - Straight metal stem for truck and bus.

90° Bend Brass Stems - Made to use with calcium chloride

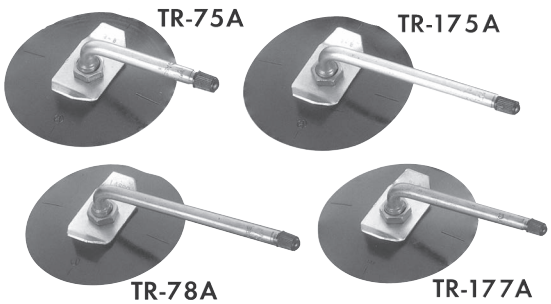

440 Series Equivalent Table		
New No.	Length	Replaces
TR440	3.35"	TR75A
TR441	4.13"	TR177A
TR442	4.53"	TR77A
TR443	4.92"	TR175A
TR444	5.51"	TR78A
TR445	6.10"	TR179A

TRJ1175C - Large bore version of TR442



JS2 - Metal stem for industrial application.

Order by phone (651) 456-5600; Toll free: (800) 328-7400

Flaps

Bias Flaps

Part No.	Tire Size	Valve Placement	Flap Size	Actual Width	Box Qty.
FLA8036	23x10-12, 24x12-12	Center	12-8.5	8.25”	20
FLA8037	6.50-14	Center	14-5	5.00”	25
FLA8260	40x14-16	Center	16-12	11.50”	5
FLA8270	44x16-18	Center	18-12	11.75”	5
FLA8280	49x17-20	Center	20-14	13.00”	5
FLA8245	49x17-20	Center	20-15	14.00”	5
FLA8152	50x20-20, 52x20.5-20	Center	20-17	16.50”	1
FLA8165	11.00/12.00-24	Center	24-8.2	8.25”	5

Radial Flaps

Part No.	Tire Size	Valve Placement	Flap Size	Actual Width	Box Qty.
FLA8005	5.00/5.70R8	3/4” Off Center	8R5.7	5.75”	40
FLA8010	6.00/6.90R9	Center	9R6.5	6.75”	40
FLA8020	6.50/7.50R10	Center	10R6.0	6.50”	30
FLA8035	7.00/8.25R12	Center	12R5.5	5.25”	35
FLA8040	7.00/7.50R15	3/4” Off Center	15R7.0	6.75”	21
FLA8050	6.50/7.00/7.50/8.25R15	Center	15R7.0	7.00”	21
FLA8060	9.00/10.00/11.00R15	Center	15R7.9	7.50”	10
FLA8065	14.50R-15	Center	15R10	9.25”	15
FLA8070	6.50/7.00/7.50/8.25R16	3/4” Off Center	16R6.9	6.50”	10
FLA8075	6.50/7.50R16	Center	16R6.9	6.75”	18
FLA8080	12.50R16	Center	16R8	7.50”	18
FLA8085	7.50R17	Center	17R7.1	7.10”	30
FLA8095	7.50R18	Center	18R7.1	7.10”	18
FLA8130	13.00/14.00R20	Center	20R9.9	9.25”	18
FLA8115	7.50/8.25/9.00R20	Center	20R7.4	7.75”	10
FLA8120	10.00/11.00/12.00R20	Center	20R8.0	8.00”	10
FLA8150	49x17R20	Center	20R14	13.75”	5
FLA8140	16.00R20/21	Center	20R12	12.00”	5
FLA8155	10.00/11.00/12.00R22	Center	22R8.0	8.75”	10
FLA8170	13.00/14.00R24	3/4” Off Center	24/25-10.1	9.75”	5
FLA8171	13.00/14.00R24/25	Center	24R11.1	10.50”	6
FLA8185	16/17.5R24/25	Center	24/25R12	10.50”	5
FLA8195	18.00R24/25	Center	24/25R14	13.00”	5
FLA8220	20.5R25	Center	25R18.5	18.00”	3
FLA8230	23.5R25	Center	25R23.5	19.00”	3

O-Rings & L-Rings

O-Rings

Part No.	Rim Type	Rim Size	Rod Diameter
ORI20JM	Hwy. (JM RIM)	20”	.26
ORI220TG	Grader	20”	.26
ORI320A	Hwy. Grader	20”	.375
ORI24JM	Hwy. (JM Rim,)	24”	.26
ORI224TG	Grader	24”	.26
ORI25TAOS	Grader (Oversized)	25”	.26
ORI25T	Earthmover (Small Diameter)	25”	.26
ORI325T	Earthmover (Large Diameter)	25”	.375
ORI329T	Earthmover	29”	.375
ORI232TG	Small Cross Section	32”	.26
ORI332T	Large Cross Section	32”	.375
ORI333T	Earthmover	33”	.375
ORI335T	Earthmover	35”	.375
ORI339T	Earthmover	39”	.375
ORI345T	Earthmover (Small Diameter)	45”	.375
ORI349T	Earthmover	49”	.375

All O-Rings sold in pairs; L-Rings Sold Indivifually

Arctic O-Rings

Part No.	Rim Type	Rim Size
ORI224TGA	Arctic O-Ring	24”
ORI25TA	Arctic O-Ring	25”
ORI325TA	Arctic O-Ring	25”
ORI329TA	Arctic O-Ring	29”
ORI335TA	Arctic O-Ring	35”

L-Rings (For Earthmover Tires)

Part No.	Rim Size
ORILR-20	20” L-Ring Seal
ORILR-25	25” L-Ring Seal
ORILR-29	29” L-Ring Seal
ORILR-33	33” L-Ring Seal


Tire Cart

- This tire cart offers excellent maneuverability even with a full load of tires.
- Handles 12” passenger thru 35” O.D. truck tires.
- Minimum opening 21” Maximum opening 37”
- Easy one step operation.

Part No. BRTTC



Valve Fishing Tools

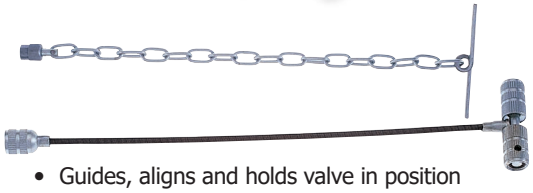

- Guides, aligns and holds valve in position with valve hole while mounting tire

Part No.	Bore	Description
DIL8909	Standard	9-3/4” Chain
DIL8909C	Large	30” Chain
HALTL-645-24	Standard	24” Cable
HALTL-650	Standard	9-3/4” Chain
MVT8909HD	Standard	9-3/4” Chain
REM836	Standard	9-3/4” Cable

Wheel Dolly

Part No. ASC03000

- Reduce back injuries
- Perfect stud alignment
- Perfect for 8-10 hole Budd type wheels
- Removes truck wheels and tires fast and easy
- Increases productivity
- Reduces manpower needs
- Saves time and money, maintenance free
- Works with tires 23.5” to 43.5”



Part No. ESCTWD1

- Tire/wheel is rotated left or right on tiltable roller pads for perfect stud alignment.
- Perfect for 8-10 hole Budd type wheels.
- Removes tire/rim assembly fast and easy.
- Saves time, money, and is maintenance free.
- Heavy duty tubular construction lifts 280 lbs. 3” caster/wheels roll the truck wheels for effortless removal or replacement. Works with tires 19.5” through 24.5”.



Part No. GTCY471105

- Easy installation and removal of truck tire/wheel assemblies
- One man control
- Heavy-duty industrial bearings
- 3 positions for rollers depending on tire size
- Great tool for every service truck
- Avoid damage to wheel bolts and expensive modern rims
- For all wheels from 6.5” - 24.5”, including super singles



Small Tire Accessories

Small Tire Irons



Part No.	Length	Stock	Weight
KENT9A	9”	7/16”	.4 lbs.



Part No.	Length	Stock	Weight
KENT16A	16”	7/16”	.7 lbs.



Part No.	Length	Stock	Weight
KENT5	16”	7/16”	.8 lbs.



Part No.	Length	Stock	Weight
KENT8	16”	7/16”	.8 lbs.

Heavy Duty Floor Mount Tire Spreader

Versatile enough to be used at the corner service center, high volume tire service centers, or section repair shops.

Can accommodate all tires from garden service through light truck tires!

Adjustable tire spreader with 4 tilt settings!



360° swivel top

Part No. ASC604-01275

Leak Detectors



- Locates the slightest air leaks when applied to an inflated tire
- Concentrated formula dilutes with water



Part No.	Brand	Description
ASC2543	Ascot	1 Quart - Ratio 21:1
KEND105A	Ken-Tool	1 Quart - Ratio 21:1
KENT147A	Ken-Tool	1 gallon - Ratio 21:1
RMMSSLD	Safety Seal	8oz - Ratio 80:1
XSP14-755	Xtra Seal	8oz - Ratio 8:1

Test Tank

- Durable polyethylene construction
- High Strength
- Leak-Proof



Part No.	Length	Width	Height
XSP14-955	31”	12-3/4”	12-3/4”
XSP14-956	35”	15-1/2”	17”

Lube Bottles & Brushes



Part No. CBS12677 - Lube Bottle
Part No. CBS12678 - Handle Swab



- Fill handle with water for using with wax type lube

Part No. REM73 - 1” Brush
Part No. REM73T - 2” Brush

Bead Lubricants

Tire and Tube Mounting Compound



Part No. REM75 - 7.7 lb. pail
Part No. REM75N - 7.7 lb. pail

Hanco Lubricant



Part No. NRH1 - 1 gal. bottle
Part No. NRH5 - 5 gal. pail
Part No. NRH55 - 55 gal. drum

Accessories

Tire & Tube Test Dunker

- Tub 55" Inside Diameter x 24" Deep
- Seamless Polyethylene Tub
- Accessible From All Sides
- 360 Degree Rotation Submerged
- Curved Spider Rods w/ Sleeves Protects Custom Wheels
- Air Power Up & Down - No Springs
- Easy to Clean 1-1/2" Bottom Drain
- Shown with optional ball valve drain and caster kit



Part No. MOV55TG

Bead Bazookas



The new BEAD BAZOOKA® utilizes an upgraded version of the trigger-operated rapid air release (RAR) valve technology found in the original BEAD BAZOOKA® models. The extra power it delivers allows it to be smaller and lighter while still allowing the user to seat even the most stubborn tire beads. The new valve is also easily serviced or replaced so that you can expand its service life and maximize uptime.

- Half the size twice the power
- Serviceable/Replaceable 2" RAR valve
- Utilizes ultra-compact design
- Anti-corrosion interior tank coating

Part No.	Tank Size	Weight
GTCBB3L2	3 Liter	13.0 lbs
GTCBB6L2	6 Liter	18.0 lbs
GTCBB10L2	10 Liter	20.0 lbs

Tire Studding Equipment



Part No.	Description
STUM10GOKU	OKU Model 10 Auto Stud Gun
STUM10G	BW Model 10 Auto Stud Gun
STU4048	Feeder Boy for Stun Guns
STU0513	Feed Hose (4 ft.)
STU0382	Repair Kit for STUM10



Part No.	Description	Length	Jacket Diameter	Bottom Diameter
STU11	#11 Tire Studs 1000/Box	.345"	.197"	.354"
STU12	#11 Tire Studs 1000/Box	.375"	.197"	.354"
STU13	#11 Tire Studs 1000/Box	.470"	.197"	.354"
STU15	#11 Tire Studs 1000/Box	.520"	.197"	.354"
STU16	#11 Tire Studs 1000/Box	.585"	.197"	.354"
STU17	#11 Tire Studs 1000/Box	.615"	.197"	.354"

Small Tire Changers & Bead Seaters

CH-22/23 Multi-Tire Changer & Bead Breaker Station

The CH-22/23 Multi-Tire Changer makes the job easy, fast and economical! No other Multi-Tire Changing Station works as well as the CH-22/23!



CH-23


The CH-22 comes with:

- Rim clamp plate - adjustable from 4”-16.5”
- 2 center posts - one for open type or hub type wheels and the other for bearing type wheels
- CH-4 Mongoose tire tool

Small tire and wheel changing problems are over!

Change 4” to 16.5” tires with ease and speed!

Simply the best tire changer for tires 10” and under!

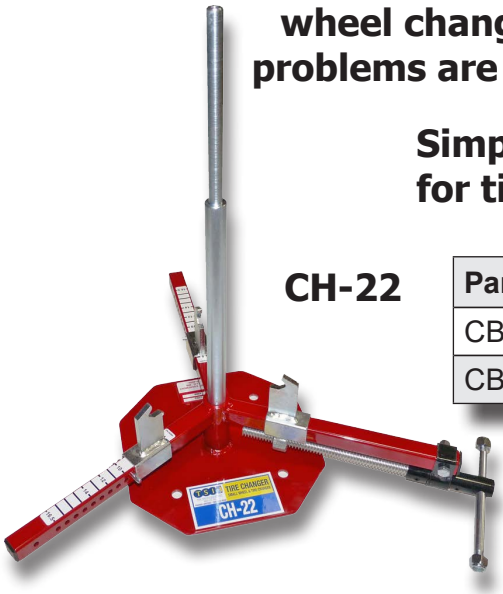

CH-22

Part No.	Description	Height	Length	Width	Weight
CBSCH-22	Small Tire Changer	7”	20”	20”	23 lb
CBSCH-23	Bead Breaker Tire Station	26.5”	22.5”	12”	93 lb

Cheetah Bead Seaters



CBSCBS



CBSCH13AL

Cheetah Bead Seaters make seating the most difficult bead not only safe but simple, fast and economical.

Easily seats the toughest bead, from small tires to large truck tires.

Completely self-contained and portable.

Part No.	Size	Description
CBSCBS	5 Gallon	Steel Tank
CBSCH5AL	5 Gallon	Aluminum Tank
CBSCH10AL	10 Gallon	Aluminum Tank
CBSCH13AL	13 Gallon	Aluminum Tank
CBSVP13AL	13 Liter	Aluminum Tank
CBSVP18AL	18 Liter	Aluminum Tank



CBSVP13AL

Motul

Motul is a French company which has manufactured, developed, and distributed lubricants for engines for more than 150 years. Motul has been a leader in high performance motor oils and industrial lubricants in Europe and has been expanding into the US. Hanco is proud to be an authorized distributor of Motul products.

Engine Lubricants

Motul lubricants protect your engine throughout its life-cycle in accordance with the recommendation of the manufacturers' and the various industry standards such as EURO, which sets limits on emissions, and other standards like ACEA, API, JASO, NMMA FC-W.



Also available in 5L and 208L.



Additives

Wear and tear on your vehicle happens in all aspects of daily life. Whether stuck in traffic, driving short distances, carrying heavy loads, riding off-road or pushing full throttle in the fast lane, your lubrication and fuel system needs extra maintenance and care.

Transmission Fluids

With Motul's transmission fluids, gear changing has never been so smooth! A complete range of lubricants for a wide variety of applications, from mechanical transmissions to all the different types of automatic gearboxes (including robotized, CVT and dual clutch). Maximum protection and longer transmission life time is achieved in every condition.



Display Stands



Brake Fluids



Brake fluid is essential for a car's hydraulic brakes. Hydraulic fluid works by transferring force into pressure so that braking force is maximized. Motul's brake fluid line of products, includes everything from brake fluids DOT 3, DOT 4 and DOT 5.1, to Racing Brake Fluids. They're suitable for a variety of different cars, fitted or not, with ABS or ESP systems. Whether used in normal or extreme conditions, you can be assured that Motul will have something suitable for your specific type of application for peace of mind and a smooth journey.

Please visit hancousa.com to see the full list of Motul products we offer!

Order by phone (651) 456-5600; Toll free: (800) 328-7400

Alphabetical Index

A

A.C.T. Radial....33
A.C.T. HD Radial....33
Agricultural Chains....45
Agricultural Tires....44
Agricultural Valve Kit....49
Alpha Numeric Cross Reference Chart....7
All Steel CSL 16....6
All Trail....29
All Trail 2....29
AT101 Chevron....21
AT489....25
AT489 II....26
AT489 XD....25
ATV Chains....37
ATV Tires (Bias)....25-32
ATV Tires (Radial)....33-36
ATV Tubes....54

B

Badlands A/R....34
Bead Seaters....61, 62
Berm Raider....32
Bias Farm Tubes....50, 51
Bias Light Truck Tubes....47
Bias Loader/Grader Tubes....49
Bias Passenger Tubes....46
Bias Trailer Tires....2-4
Black Rock....28
Buffalo (Bias)....31
Buffalo (Radial)....35
Bus Tubes....48

C

Calcium Chloride....43
Castle Tread....19
Carlisle Straight Rib....16
Chevron Tread....21
Chloride Pump....43
Chrome Wheels....9
Commercial & Turf D266....10
Commercial Turf DI-5005....14

D

Deestone Golf Cart....23
Deestone Forklift Tires....39
Deestone Lawn & Garden....10, 14, 17
Deestone Lug....22
Deestone Rib....17
Deestone Sawtooth Tread....18
Deestone Trailer Tires....4
DI-K968....30
Dimpled Knobby....30
Dirt Commander....32
Drag Racing Tubes....53
Duro ATV Tires....31-32, 34-35
Duro Lug Tires....22

F

Fairway Pro....23
Farm Specialist....44
Farm Tires....44
Farm Tubes....50-52
Fast Trax....26
Flaps....58
Flat Free Knobby....20
Flat Free Rib....19
Flat Free Sawtooth....18
Flat Free Smooth....17
Flat Free Turf....12
Forklift Chains....40
Forklift Tires....38-39
Frontier....35

G

Garden Tractor Chains....24
GBC ATV Tires....32, 35, 36
Golf Cart Tires....23-24
Golf Cart Tubes....53
Grader Tubes....49
Grass Master....16
Greensaver....23
Ground Force Ultra Rib....38
Ground Force 400 R4....42
Ground Force 400 MX....42
Guard Dog HD....42

H

Heavy Duty (H.D.) Field Trax....29
Heavy Duty (H.D.) Truck Tubes....48
HF-252....21
High Speed Trailer Tires....2-7
High Speed Trailer Tubes....46
High Speed Trailer Wheels....8

I

Implement Tubes....50
Industrial All Purpose....38
Industrial Conversion Chart....43
Industrial Deep Traction....38
Industrial Tires....37-39
Industrial Trax....37
Industrial Tubes....56
Inflation Cages....40
Inner Tubes....46-58

K

Kanati Mongrel....35
Kenda Bias Trailer Tires....3
Kenda Forklift Tires....39
Kenda Pro Tour....24
Kenda Radial Trailer Tires....7
Kenda Skid Steer Tires....41
Knobby Tread....30

L

Large Bore Inner Tube Valves....38
Lawn & Garden Chains....24
Lawn & Garden Tires....9-17
Lawn & Garden Tubes....53
Lawn & Turf D265....14
Lawn Master....16
Light Truck Tubes....47
Links Tread....23
Load Range Conversion Chart....7
Loader Tubes....49
Low Platform Trailer Tires....2, 4
Low Platform Trailer Tubes....48

Alphabetical Index

Low Speed Tires....18-19
Lug Type Tires....21-22

M

Markal E-Z Break....7
Medium Truck Tubes....48
Modular Wheels....8
Motorcycle Tire Conversion Chart....56
Motorcycle Tubes....56
Motul....62
Mounting Lubricant....60
Mud Wolf....28
Mud Wolf XL....27
Multi Trac C/S....9

N

Natural Rubber Tubes....49, 52-53
Nitrile Gloves....7

O

O-Rings/ L-Rings....59
Off-The-Road Tubes....49
Omni Trail Radial Trailer Tires....6
OTR 350 Mag....31

P

Passenger Tubes....46
Pavemaster....33
Penetrating Oil....7
Polaris PXT2....26
Power Grip....34
Power Trac....22
Power Trail....31
Premium Wide Trac....38
Pro Tour....24

R

Radial ATV Tires....33-36
Radial Farm Tubes....50-52
Radial Heavy Duty Truck/Bus Tubes....48
Radial Light Truck Tubes....47
Radial Passenger Tubes....46
Radial Loader/Grader Tubes....48
Radial Low Platform Trailer Tubes....48
Radial Trail HD....5
Radial Trail RH....5
Radial Trailer Tires....5-7
Radial Tubeless Wheel Tubes....48
Rib Tires....16-17, 19
Rock Grip....41

S

Sawtooth Tread....18
Scooter Tubes....56
Severe Service Tubes....52
Skid Steer Chains....43
Skid Steer Tires....41-42
Smooth Tread....17
Snow Hog....21
Snowblower Chains....24
Snowblower Tires....21
Soft Turf....15
Spartacus....36
Spoke Wheels....8
Sport Trail....2
Sport Trail LH....2
Straight Rib Tread....16-17
Stryker....28
Stud Tread....20
Super Lug....22
Super Turf....15

T

Terrathon....27
Thrasher....35
Tire Carts....59
Tire Chains....24, 37, 40, 43, 45
Tire Changer....62
Tire Gauge....27
Tire Irons....60
Tire Lubricants....60
Tire Sealants....44
Tire Spreaders....60
Tire Studs & Equipment....61
Tire & Tube Test Tanks....60, 61
Tour Max....23
Towmaster Trailer Tires....3
Trac Chief....41
Traction Tires....20-22
Trail Wolf....26
Trailer Tires....2-7
Trailer Wheels....8
Transmaster Golf Cart....23
Transmaster Rib....17
Transmaster Sawtooth....18
Transmaster Stud....20
Transmaster Wheelbarrow....19
Tru Power....22
Turf Armor....13
Turf CTR....13
Turf Master....11
Turf Master Plus....9
Turf Pro R-3....13
Turf Saver....12
Turf Saver 2....13
Turf Tamer Knobby....30
Turf Trac R/S....10

U

Ultra CRT....6
Ultra Guard MX....42
Ultra Sport Radial RH....5
Ultra Trac....13
Ultra Turf....14
USA Trail....2
Utility Tire....20

V

Valve Offset Diagram....46
Valve Reference Chart....57
Versa Trail....34

W

Wheelbarrow Tires....19
Wheels....8
Wonder Pump....43

X

X-Trac....21

Order by phone (651) 456-5600; Toll free: (800) 328-7400

Tire Repair Supplies and Service Equipment

Hanco is a distributor for the below vendors and as well as several others




SERVING THE TIRE INDUSTRY SINCE 1928
An ASCOT Supply Corporation Supplier